

305 Rec'd PCT/PTO 07 AUG 1998

FORM PTO-1390 (REV. 10-96)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 59276	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>09/11/970</b>	
INTERNATIONAL APPLICATION NO. PCT/DE97/00261		INTERNATIONAL FILING DATE February 12, 1997		PRIORITY DATE CLAIMED February 12, 1996	
TITLE OF INVENTION METHOD AND DEVICE FOR BINDING A WIRE CONDUCTOR					
APPLICANT(S) FOR DO/EO/US FINN et al.					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Items 11. to 16. below concern document(s) or information included:					
11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information:					
Formal Drawings (9 sheets) Express Mail Label dated August 7, 1998 (EL086738507US) Small Entity Document					

U.S. APPLICATION NO (if known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO PCT/DE97/00261		ATTORNEY'S DOCKET NUMBER 59276	
--	--	--	--	-----------------------------------	--

17. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):</b> Search Report has been prepared by the EPO or JPO ..... \$930.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... \$720.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... \$790.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$1,070.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) ..... \$98.00  <div style="text-align: right;"><b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b></div>				<b>CALCULATIONS</b> PTO USE ONLY	
				\$	930.00
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	0
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	39 - 20 =	19	X \$22.00	\$	418.00
Independent claims	5 - 3 =	2	X \$82.00	\$	164.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+	\$270.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$	1,512.00
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$	-756.00
<b>SUBTOTAL =</b>				\$	756.00
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	0
<b>TOTAL NATIONAL FEE =</b>				\$	756.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+	\$
<b>TOTAL FEES ENCLOSED =</b>				\$	756.00
				Amount to be:	\$
				refunded	\$
				charged	\$

a. ☒ A check in the amount of \$ 756.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 13-0410. A duplicate copy of this sheet is enclosed.


  

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

MCGLEW AND TUTTLE  
 Scarborough Station  
 Scarborough, New York 10510-0827  
 Telephone No.: (914)941-5775  
 Facsimile No.: (914)941-5855

  
 SIGNATURE: \_\_\_\_\_  
 John James McGlew  
 NAME  
 31,903  
 REGISTRATION NUMBER

ATTORNEY DOCKET NO: 59276

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : FIN et al.  
PCT No : PCT/DE97/00261  
Filed : August 6, 1998  
For : METHOD AND DEVICE...  
Dated : August 7, 1998

Hon. Commissioner of Patents  
and Trademarks  
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Prior to initial examination, please amend the above-identified application as follows:

IN THE SPECIFICATION:

Page 1, (after the title) delete lines 1-3 and replace them with:

-- **FIELD OF THE INVENTION**

The present invention relates to a process for the contacting of a wire conductor in the course of the manufacture of a transponder unit arranged on a substrate and comprising a wire coil and a chip unit and a device for implementing the process and a device for the wiring of a wire-shaped conductor on a substrate.

## BACKGROUND OF THE INVENTION --

Page 2, after line 5, insert:

--SUMMARY AND OBJECTS OF THE INVENTION--

delete lines 10-12

Page 13, delete line 13 and insert:

-- The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of this disclosure. For a better understanding of the invention, its operating advantages and specific objects attained by its uses, reference is made to the accompanying drawings and descriptive matter in which a preferred embodiment of the invention is illustrated.

## BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings: --

Page 14, line 21 inset:

-- Fig. 13 is a top view of a card inlet pertaining to a chip card with a transponder unit formed from a wire coil and a chip unit;

Fig. 14 is a sectional representation of the card inlet represented in Fig. 13 according to the course of the line of intersection II-II, for the purpose of elucidating the manufacturing process;

Fig. 15 is another sectional representation of the card inlet represented in Fig. 13 according to the course of the line of intersection III-III;

Fig. 16 is a representation corresponding in its view to Fig. 14 for the purpose of elucidating an alternative procedure with subsequent application of a chip unit;

Fig. 17 is a view showing the contacting of the chip unit applied subsequently according to Fig. 17;

Fig. 18 is a possible contact metallization of a terminal area of a chip with contacting according to the process represented in Fig. 17;

Fig. 19 is another possible contact metallization of a terminal area of a chip; and

Fig. 20 is a representation corresponding in its view to Fig. 14 of a transponder unit arranged on a coil substrate. --

Page 31, after line 20, insert:

-- While specific embodiments of the invention have been shown and described in detail to illustrate the application of the principles of the invention, it will be understood that the invention may be embodied otherwise without departing from such principles. --

IN THE CLAIMS:

Please cancel claims 1- 39 without prejudice and replace them with the following new claims:

40. A process for the contacting of a wire conductor in the course of the manufacture of a transponder unit arranged on a substrate and including a wire coil and a chip unit, the process comprising the steps of:

a first phase in which the wire conductor is guided away via a terminal area or a region accepting the terminal area and is fixed on the substrate relative to the terminal area or the region assigned to the terminal area; and

a second phase in which the connection of the wire conductor to the terminal area is effected with a connecting instrument.

41. The process according to claim 40, wherein an ultrasonic instrument is used as the connecting instrument for the purpose of connecting the wire conductor to the

terminal area.

42. The process according to claim 40, wherein an ultrasonic instrument is used both as the connecting instrument for the purpose of connecting the wire conductor to the terminal area and for the purpose of arranging the wire coil on the substrate.

43. The process according to claim 40, wherein the arrangement of the wire coil on the substrate of the wire conductor is effected by means of a wiring device taking the form of an ultrasonic instrument in such a way that the wire conductor is subjected to the action of ultrasound in a direction transverse to the wiring plane and the transverse movement of the wiring device generated by the ultrasonic loading is superimposed on the wiring movement extending in the wiring plane.

44. The process according to claims 40, wherein the transverse movement takes place along a transverse-movement axis that is variable as regards its angle in relation to the axis of the wiring movement.

45. The process according to claim 43, wherein the ultrasonic frequency and/or the angle between the axis of the wiring movement and the transverse movement axis is varied as a function of the desired depth of penetration of the wire conductor.

46. The process according to claim 40, further comprising guiding away, via a substrate recess, a final coil region and an initial coil region of a coil which is formed on the substrate by the wiring.

47. The process according to claim 46, wherein ultrasonic loading of the wire conductor is interrupted in the region of the substrate recess.

48. The process according to claim 43, for the purpose of crossing a wire section that has already been wired the ultrasonic loading of the wire conductor is interrupted in the crossing region and the wire conductor is guided in a crossing plane that is spaced in relation to the wiring plane.

49. The process according to claim 40, wherein the chip unit is connected to the coil, whereby in a wiring phase the coil having an initial coil region and a final coil region is formed on the substrate by means of a wiring device and in a subsequent connection phase a connection is implemented between the initial coil region and the final coil region to terminal areas of the chip unit by means of a connecting device.

50. The process according to claim 49, wherein the substrate consists of a fleece-type material, including one of paper or cardboard, and the connection which is made in the course of the wiring is effected by means of a layer of adhesive disposed



between the wire conductor and a surface of the substrate.

51. The process according to claim 49, wherein the connection of the initial coil region and of the final coil region to the terminal areas of the chip unit is effected by means of a thermocompression process.

52. The process according to claims 49, wherein a manufacture of a plurality of card modules takes place simultaneously in such a way that in a supply phase a plurality of substrates combine to form a yield and are supplied to a production device comprising a plurality of wiring devices and connecting devices, subsequently in the wiring phase a plurality of coils are formed simultaneously on substrates arranged in a row, then in the connection phase a plurality of chip units are connected via their terminal areas to the coils, and finally in a separation phase a separation of the card modules from the composite yield takes place.

53. The process according to claim 40, wherein a rotationally symmetrical coil is formed with a wire conductor wired on a substrate taking the form of a winding support and rotating relative to the wiring device.

54. The process according to claim 53, further comprising providing a vibrating diaphragm wherein the rotationally symmetrical coil is provided for the manufacture

of a moving coil of a loudspeaker unit which is integrally connected to the vibrating diaphragm.

55. The process according to claims 40, wherein a number of wiring devices corresponding to the number of cable conductors desired are arranged transverse to the longitudinal axis of a ribbon-shaped substrate and a relative movement between the substrate and the wiring devices takes place in the direction of the longitudinal axis of the substrate.

56. The process according to claim 40, further comprising a preparatory treatment of the aluminum surface of the terminal area prior to the connection of the wire conductor to the terminal area.

57. The process according to claim 56, wherein with a view to preparatory treatment a mechanical elimination of an oxide layer disposed on the aluminum surface is effected by subjecting the terminal area to the action of an ultrasonic instrument.

58. The process according to claim 56, wherein with a view to preparatory treatment the aluminum surface is subjected to a cleansing process.

59. The process according to claim 58, wherein the cleansing process includes

at least one of a dry-etching process, a wet-etching process or a laser treatment of the aluminum surface.

60. The process according to claim 56, with a view to preparatory treatment the aluminum surface is provided with a multilayered contact metallization having a zincate layer which is applied by way of intermediate layer onto the aluminum face and having an interconnect layer which is provided for the contacting with the wire conductor.

61. The process according to claim 60, wherein the interconnect layer takes the form of a layer comprising one of nickel or palladium.

62. The process according to claim, wherein a vibrational loading of the wire conductor brought about by ultrasound takes place in a plane substantially parallel to the terminal area and transverse to the longitudinal axis of the wire conductor.

63. The process according to claim 62, wherein a vibrational loading of the wire conductor brought about by ultrasound serves for regional removal of a wire-conductor insulation.

64. The process according to claim 40, wherein a fixation of the wire conductor is effected on a plastic support sheet which together with the wire conductor and the

chip forms a card inlet for the manufacture of a chip card.

65. The process according to claim 64, wherein a fixation of the wire conductor on the plastic support sheet and the connection of the wire conductor to the terminal areas of the chip serves to form a mechanical suspension of the chip on the plastic support sheet.

66. The process according to claim 40, the fixation of the wire conductor is effected by wiring with a wiring device comprising an ultrasonic instrument.

67. The process according to claim 64, wherein the ultrasonic instrument for the wiring of the wire conductor on the support sheet brings about a vibrational loading of the wire conductor transverse to the longitudinal axis of the wire conductor and transverse to the surface of the support sheet, and the ultrasonic instrument for the connection of the wire conductor to the terminal area brings about a vibrational loading of the wire conductor in a plane substantially parallel to the support sheet and transverse to the longitudinal axis of the wire conductor.

68. A device for contacting of a wire conductor in the course of the manufacture of a transponder unit arranged on a substrate and including a wire coil and a chip unit, the process including the steps of a first phase in which the wire

conductor is guided away via a terminal area or a region accepting the terminal area  
and is fixed on the substrate relative to the terminal area or the region assigned to the  
terminal area and a second phase in which the connection of the wire conductor to the  
terminal area is effected with a connecting instrument, the device comprising:

a wire guide; and

an ultrasonic generator, the ultrasonic generator being connected to the wire  
guide in such a way that the wire guide is stimulated to execute ultrasonic vibrations  
in the direction of the longitudinal axis.

69. The device according to claim 29, wherein the wire guide includes a  
vibrating punch partially encompassing the cross-section of the wire of the wire  
conductor and the ultrasonic generator includes an ultrasonic oscillator which brings  
about a vibrational loading of the vibrating punch transverse to the longitudinal axis  
of the wire conductor which is guided in a profiled end of the vibrating punch.

70. The device according to claim 69, wherein the ultrasonic instrument is  
coupled to a wiring instrument.

71. The device according to claim 69, wherein the ultrasonic oscillator of the  
ultrasonic instrument serves simultaneously for ultrasonic loading of the wiring  
instrument.

72. The device according to claim 71, wherein the ultrasonic oscillator is arranged in such a way that the axis of its effective direction is variable.

73. A device for the wiring of a wire shaped conductor arranged on a substrate and including a wire coil and a chip unit, the process including the steps of a first phase in which the wire conductor is guided away via a terminal area or a region accepting the terminal area and is fixed on the substrate relative to the terminal area or the region assigned to the terminal area and a second phase in which the connection of the wire conductor to the terminal area is effected with a connecting instrument, the device comprising:

an ultrasonic generator and a wire guide arranged next to a vibrating punch and coupled to the ultrasonic generator for subjecting the wire conductor to the action of mechanical vibrations induced by ultrasound and acting in the longitudinal direction of the vibrating punch.

74. The device according to claim 73, further comprising: a pivotal axis coaxial with a vibrating-punch axis.

75. The device according to claim 74, wherein the wire guide comprises a wire-guidance capillary which at least in the region of a wire-guide nozzle extends in the wire guide parallel to the longitudinal axis.

76. The device according to claim 75, wherein the wire guide comprises, spaced from the wireguide nozzle, at least one wire-supply channel extending obliquely in relation to the longitudinal axis of the wire guide.

77. The device according to claim 76, wherein the ultrasonic generator is arranged coaxially with respect to the wire guide.

78. A process for contacting of a wire conductor arranged on a substrate and including a wire coil and a chip unit, the process comprising:

a first phase in which the wire conductor is guided away via a terminal area or a region accepting the terminal area and is fixed on the substrate relative to the terminal area or the region assigned to the terminal area;

a second phase in which the connection of the wire conductor to the terminal area is effected with a connecting instrument, the device comprising;

using a wire guide;

using an ultrasonic generator, the ultrasonic generator being connected to the wire guide in such a way that the wire guide is stimulated to execute ultrasonic vibrations in the direction of the longitudinal axis;

providing a yield supply station for supplying a plurality of substrates arranged in a yield;

providing a wiring station with a plurality of wiring devices arranged in a row

15 transverse to a production direction;

providing an assembly station with at least one assembly device for equipping  
the individual substrates with a chip unit; and

providing a connection station with at least one connecting device for connecting  
the chip units to an initial coil region and to a final coil region of the coils which are  
20 formed on the substrates by the wiring devices.


### REMARKS

Claims 40 through 78 are in this application and are presented for  
consideration. Claims 1 through 39 have been cancelled.

The specification and claims have been amended in order to place this  
application in better form. The changes include the addition of headings and the  
removal of references to claim numbers.

Favorable action on the merits is respectfully requested.

Respectfully submitted  
for Applicant,

By:   
John James McGlew  
Registration No. 31,903  
McGLEW AND TUTTLE

JJM:jj/aes  
59276.1



DATED: August 7, 1998  
SCARBOROUGH STATION  
SCARBOROUGH, NEW YORK 10510-0827  
(914) 941-5775

SHOULD ANY OTHER FEE BE REQUIRED, THE PATENT AND  
TRADEMARK OFFICE IS HEREBY REQUESTED TO CHARGE SUCH FEE TO  
OUR DEPOSIT ACCOUNT 13-0410.

I HEREBY CERTIFY THAT THIS CORRESPONDENCE IS BEING DEPOSITED  
WITH THE UNITED STATES POSTAL SERVICE AS EXPRESS MAIL IN AN  
ENVELOPE ADDRESSED TO: COMMISSIONER OF PATENTS AND  
TRADEMARKS, WASHINGTON, D.C. 20231, NO.: EL086738303US

McGLEW AND TUTTLE  
SCARBOROUGH STATION, SCARBOROUGH, NY 10510-0827

BY:  DATE: August 7, 1998

09/117970

Process and device for contacting a wire conductor

The present invention relates to a process according to the preamble to Claim 1 and also to a device having the features of Claim 29 or 34 for implementing the process.

- 5 In particular in the course of the manufacture of transponder units arranged on a substrate and comprising, by way of essential elements, a wire coil and a chip unit which has been contacted with the ends of the coil, the contacting of the ends of the coil with the terminal areas
- 10 of the chip unit proves to be a particular problem. This is mainly due to the very small dimensions of the components to be connected to one another. For instance, the terminal areas of a chip unit, which as a rule are of square or approximately square design, customarily have an
- 15 edge length of about 100 to 150  $\mu\text{m}$ . By way of coil wire, particularly for the purpose of forming low-frequency coils, use is made of a copper wire having a diameter which as a rule amounts to around 50  $\mu\text{m}$ .
- 20 As can be gathered from WO 91/16718, for instance, in the past a direct contacting of the ends of the coil wire with the terminal areas of a chip unit has been circumvented through use being made, by way of coupling element between the ends of the coil wire pertaining to a wire coil
- 25 arranged on a coil substrate and the terminal areas of the chip unit, of a contact substrate comprising enlarged terminal areas, so that by virtue of the contact faces of the contact substrate that are very large in comparison with the diameter of the coil wire a contact could be
- 30 brought about without making great demands as regards the precision of the relative positioning between the ends of the coil wire and the contact faces. Since with the known process the chip unit is equipped with additional contact conductors for the purpose of making contact with the
- 35 enlarged terminal areas of the substrate, in the case of the manufacturing process known from WO 91/16718 a total of

at least three contacting steps are required in order finally to establish an electrically conductive contact between the terminal areas of the chip unit and the wire coil.

5

The object underlying the invention is therefore to propose a process and also a device enabling direct contacting of wire ends on the terminal areas of a chip unit.

10 This object is achieved by means of a process having the features of Claim 1 and by means of a device having the features of Claim 29 or 34.

With the process according to the invention, in the course  
15 of the manufacture of a transponder unit arranged on a substrate and comprising a wire coil and a chip unit, the coil wire is guided in a first process step via the assigned terminal area of the chip unit, or a space that is intended to accept this terminal area, and is fixed to the  
20 substrate. By this means an exactly defined alignment of the coil wire relative to the terminal area is obtained after the first process step has been carried out. In the second process step the connection of the wire conductor to the terminal area is then effected by means of a connecting  
25 instrument.

By virtue of the process according to the invention there is no longer any necessity, with a view to bringing the terminal areas of the chip unit into contact with the ends  
30 of the coil, to provide a separate contact substrate on which enlarged terminal areas are formed. Rather, the coil substrate, which is used in any case as substrate for the wire coil and which, for example in the case where the transponder unit is intended to serve for the manufacture  
35 of a chip card, is formed by means of a plastic support sheet corresponding to the dimensions of the chip card, serves virtually as a contacting or positioning aid for the

relative positioning of the ends of the coil in relation to the terminal areas of the chip unit. In this case the chip unit may either be arranged in a recess in the substrate provided for this purpose or may be provided on the surface of the substrate. The first alternative affords the possibility of arranging the chip unit in the recess optionally prior to fixation of the wire conductors or of introducing the chip unit into the recess only after fixation of the wire conductors, in order subsequently to implement the actual contacting of the wire conductors on the terminal areas.

By virtue of the wire conductors which are fixed on the coil substrate the process according to the invention consequently enables simplified contacting of the wire conductors with the terminal areas of the chip unit.

Advantageous embodiments of the process are subjects of Claims 2 and 3.

With one variant of the process, which independently of the process according to Claim 1 for bringing a terminal area into contact with a wire conductor also enables an advantageous arrangement of the wire conductor on the substrate, the wire conductor is subjected to the action of ultrasound in a direction transverse to the wiring plane, and the transverse movement of the wiring device induced by the action of ultrasound is superimposed on the wiring movement extending in the wiring plane.

The superimposition of the wiring movement together with the transverse movement countersinking the cross-section of the wire conductor in the surface of the substrate or bringing it into close contact with the latter enables continuous operation of the wiring device, so that the wire conductor is capable of being connected to the surface of the substrate not only in the region of definite connecting

points but over any length without the actual wiring movement having to be interrupted in the process.

Furthermore, the transverse movement induced by ultrasound proves to be particularly effective during the at least  
5 partial countersinking or the close contacting of the cross-section of the wire, since the movement induced by the ultrasound extends in the direction of sinking and not transversely thereto, as is the case with the process described in the introduction.

10

It proves to be particularly advantageous if the transverse movement induced by ultrasound takes place along a transverse-movement axis that is variable as regards its angle in relation to the axis of the wiring movement. By  
15 this means it is possible to adjust the transverse-movement axis so as to conform to the special requirements. Thus it is possible in the case where an elevated temperature of the wire conductor to be countersunk is desired, possibly depending on the substrate material, to align the  
20 transverse-movement axis more in the direction of the wiring-movement axis, in order in this way to obtain a greater longitudinal-force component which acts on the wire conductor and which as a consequence of the associated rubbing of the wire guide on the wire conductor results in  
25 heating of the same. In order to obtain a rate of sinking of the wire conductor in the surface of the substrate that is as high as possible it can be advantageous to align the transverse-movement axis at an angle of  $45^\circ$  to the wiring-movement axis, in order to achieve a shearing effect in the  
30 substrate material that is as great as possible.

In order to vary the depth of penetration of the wire conductor into the surface of the substrate, the ultrasonic frequency and/or the angle between the axis of the wiring  
35 movement and the transverse-movement axis may also be varied.

With respect to a connecting process following the wiring of the wire conductor in the form of a wire coil on the surface of the substrate for the purpose of connecting the wire conductor to terminal areas of a chip unit it can  
5 prove particularly advantageous if the final region of the coil and the initial region of the coil are guided via a recess in the substrate, so that the subsequent connection of the terminal areas of a chip unit to the initial region of the coil and to the final region of the coil can be  
10 effected without impairment caused by the substrate material.

In order to enable an alignment of the initial coil region and of the final coil region that is as rectilinear as  
15 possible between opposite edges of the recess it is advantageous to interrupt the exposure of the wire conductor to ultrasound in the region of the recess.

An interruption of the exposure of the wire conductor to  
20 ultrasound also proves to be advantageous for the purpose of crossing an already wired section of wire in the crossing region, whereby in addition the wire conductor in the crossing region is guided in a crossing plane that is spaced from the wiring plane. This ensures that a crossing  
25 of wire conductors becomes possible without it being possible for damage to occur in the process as a result of collision of the wire conductors, which could possibly result in destruction of the insulation of the wire  
conductors.

30 The use of the process described above in various embodiments has also proved to be particularly advantageous for the manufacture of a card module having a substrate, a coil which is wired on the substrate and a chip unit which  
35 is connected to the coil. In this case a coil having an initial coil region and a final coil region is formed on the substrate in a wiring phase by means of the wiring

device, and in a subsequent connection phase a connection to terminal areas of the chip unit is brought about between the initial region of the coil and the final region of the coil by means of a connecting device.

5

As a result of the integration of the wiring of the wire conductor on the substrate into a process for the manufacture of a card module on the basis of any substrate that permits an at least partial penetration of the wire conductor into the surface of the substrate or close contact of the wire conductor against the surface of the substrate, this application of the process enables the formation of card modules that are easy to handle and that are used as semifinished products in the manufacture of chip cards. With a view to completion of the chip card the card modules are then, as a rule, provided on both sides with laminated surface layers. Depending on the configuration and thickness of the substrate material, the connection between the wire conductor and the substrate material can be effected via a more or less positive inclusion of the cross-section of the wire conductor in the surface of the substrate - for instance, when the substrate is formed from a thermoplastic material - or by means of a predominantly close-contact fixing of the wire conductor on the surface of the substrate, for instance by bonding the wire conductor together with the surface of the substrate. The latter will be the case, for example, when the substrate material is a fleece-type or woven-fabric-type support.

30

Particularly in the course of the manufacture of paper bands or card bands such as are used, for example, for identifying luggage, the connection of the wire conductor to the surface of the substrate via a layer of adhesive between the wire conductor and the surface of the substrate has proved to be advantageous. In this case the wire conductor comes into close contact against the surface of

35

the substrate in a peripheral region via the layer of adhesive. If the wire conductor is provided with a suitable surface coating, for example baking lacquer, the layer of adhesive may be formed from the surface coating.

5

With the application of the process as described above, the use of a thermocompression process for connecting the initial region of the coil and the final region of the coil to the terminal areas of the chip unit has proved to be particularly effective.

10

It is possible for a further increase in the effectiveness of the application of the process as described above to be achieved if a plurality of card modules are manufactured at the same time in such a way that in a feed phase a plurality of substrates arranged collected together in a yield are supplied to a card-module production device comprising a plurality of wiring devices and connecting devices and subsequently in the wiring phase a plurality of coils are formed simultaneously on substrates arranged in a row, then in the connection phase a plurality of chip units are connected via their terminal areas to the coils and finally in a separation phase a separation of the card modules from the composite yield takes place.

15  
20  
25

Furthermore, an application of the process for the manufacture of a rotationally symmetrical coil bobbin has proved advantageous wherein the wire-shaped conductor is wired on a substrate taking the form of a winding support and rotating relative to the wiring device. For the purpose of establishing the relative rotation there is the possibility either to cause the substrate to rotate about its longitudinal axis in the case of a stationary wiring device or, in the case of a stationary substrate, to move the wiring device on a trajectory about the longitudinal axis of the substrate, or even to superimpose the two aforementioned types of motion.

30  
35



The aforementioned application of the process enters into consideration in particular for the manufacture of a moving coil of a loudspeaker unit that is integrally connected to a vibrating diaphragm.

5

According to another application of the process the process serves to wire a wire-shaped conductor on a substrate by means of a wiring device that subjects the wire conductor to ultrasound with a view to manufacturing a ribbon cable,  
10 whereby a number of wiring devices corresponding to the number of cable conductors desired is arranged transversely in relation to the longitudinal axis of a ribbon-shaped substrate and a relative movement between the substrate and the wiring devices takes place in the direction of the  
15 longitudinal axis of the substrate.

In order to achieve a reliable and operationally dependable contact between the wire conductor and the terminal areas of the chip unit, which are customarily constituted by  
20 aluminium surfaces, it is advantageous, particularly when use is made of a copper wire conductor, to subject the aluminium surface of the terminal areas to a preparatory treatment. With a particularly advantageous embodiment of the process according to the invention the preparatory  
25 treatment of the aluminium surface is virtually integrated into the actual connecting operation - that is to say, the contacting of the wire conductor with the terminal areas - by virtue of the wire conductor being connected to the terminal areas by means of a connecting instrument taking  
30 the form of an ultrasonic instrument. In this case an oxide layer disposed on the aluminium surface is eliminated mechanically by subjecting the oxide layer to the ultrasonic vibrations of the ultrasonic instrument. This manner of cleansing the aluminium surfaces of the oxide  
35 layer, which takes place substantially at the same time as the actual connecting operation, has the particular advantage that with regard to shielding the connecting

points from environmental influences - by creating an inert or reducing atmosphere, for example - it is possible to dispense with special measures intended to prevent the formation of a fresh oxide layer prior to implementation of the connecting operation.

If, on the other hand, as an alternative to the aforementioned ultrasonically induced removal of the oxide layer in conjunction with an ultrasonic connecting operation a preparatory treatment or cleansing process is chosen that is decoupled from the actual connecting operation, the connecting operation itself can be carried out in an inert or reducing atmosphere.

The use of etching processes that have great selectivity proves to be particularly advantageous for the purpose of cleansing the aluminium surfaces pertaining to the terminal areas of oxide layers. An example of dry-etching processes is ion-beam etching. But the use of processes that can be implemented easily, such as wet etching or oxide-layer removal by laser treatment, in particular by excimer-laser treatment, is also advantageous.

With a view to preventing renewed oxidation of the aluminium surface there is also the possibility of providing the aluminium surface with a multilayered contact metallisation having a zincate layer applied to the aluminium surface by way of intermediate layer and having an interconnect layer which is disposed on said zincate layer and which is provided for making contact with the wire conductor. In this case the zincate layer serves primarily to eliminate the oxide layer on the aluminium surface, and the interconnect layer, which may for instance consist of nickel or palladium or corresponding alloys, serves to improve the adhesion to the copper wires which are used as a rule by way of wire conductors.

In the case where use is made of an ultrasonic instrument for establishing the connection between the wire conductor and the terminal areas it proves to be particularly advantageous if the vibrational loading of the wire conductor which is brought about by ultrasound takes place in a plane substantially parallel to the terminal area and transverse to, for instance at right angles to, the longitudinal axis of the wire conductor. For, by virtue of the transverse flexibility of the wire conductor which is fixed on the substrate on both sides of the terminal area in the longitudinal direction the greatest possible relative movements can be achieved between the wire conductor and the aluminium surface by means of the ultrasonic loading of the wire conductor which takes place transverse to the longitudinal axis of the wire.

Irrespective of the type and manner of the preparatory treatment and also of the choice of the connecting process it is a particular advantage if by way of coil substrate use is made of a plastic support sheet which together with the coil and the chip unit forms a card inlet for the manufacture of a credit card or such like. Alternatively, differing configurations of the coil carrier are also possible which in each case - that is to say, irrespective of the particular configuration - merely have to enable secure bilateral fixation of the wire conductor relative to the terminal areas of the chip unit. By this means a virtually suspended arrangement and hence a "floating acceptance" of the chip in the substrate also becomes possible. For instance, the use of a sheet of paper by way of coil substrate is also possible, in which connection the wire conductor may be fixed on the substrate via an adhesive layer which is provided on the sheet of paper and which adheres to the wire conductor, or even via an adhesive layer which is provided on the wire conductor itself, for instance a layer of baking lacquer.

Irrespective of the type of coil substrate which is used, it proves to be advantageous if the wire conductor is fixed on the substrate by means of a wiring instrument which is employed in any case for the coil-shaped arrangement of the wire conductor on the substrate and which enables a continuous or intermittent connection of the wire conductor to the surface of the substrate. In this case, particularly when use is made of plastic substrates, it proves to be advantageous if by way of wiring instrument an ultrasonic instrument is employed which enables an at least partial embedding of the cross-section of the wire conductor into the surface of the substrate and hence enables fixation with good adhesion.

A particularly good fixation of the wire conductor on the surface of the substrate and the establishment of a particularly reliable connection of the wire conductor to the terminal areas of the chip unit is possible if the ultrasonic instrument which is used for the wiring and fixation of the wire conductor on the substrate brings about a vibrational loading of the wire conductor transverse to the longitudinal axis of the wire conductor and transverse to the surface of the substrate, and if the ultrasonic instrument which is used for connecting the wire conductor to the terminal areas brings about a vibrational loading of the wire conductor in a plane substantially parallel to the substrate and transverse to the longitudinal axis of the wire conductor.

The wiring device for wiring a wire-shaped conductor on a substrate by means of ultrasound comprises a wire guide and an ultrasonic generator, whereby the ultrasonic generator is connected to the wire guide in such a way that the wire guide is stimulated to execute ultrasonic vibrations in the direction of the longitudinal axis.

It is advantageous if the device that is suitable for implementing the process according to the invention comprises an ultrasonic instrument with a vibrating punch partially encompassing the cross-section of the wire and having an ultrasonic oscillator which brings about a vibrational loading of the vibrating punch transverse to the longitudinal axis of a wire conductor that is guided by the vibrating punch.

10 According to a preferred embodiment of the device the ultrasonic instrument is coupled to a wire-laying instrument.

A particularly simple configuration of the device becomes possible if the ultrasonic oscillator of the ultrasonic instrument serves simultaneously for ultrasonic loading of the wiring instrument, for instance by the ultrasonic oscillator being arranged in such a way that the axis of its effective direction is variable.

20 According to an alternative solution the wiring device exhibits the features of Claim 34. An advantageous embodiment exhibits the features of Claim 35.

25 It proves to be advantageous for the design of the wiring device if the latter is equipped with a wire-guidance capillary which at least in the region of a wire-guide nozzle extends in the wire guide parallel to the longitudinal axis. In this manner it is ensured that in the region of the wire-guide nozzle the axial advancing movement of the wire conductor is not impaired by ultrasonically induced transverse loads. Rather the ultrasonic loading extends in the longitudinal direction of the wire.

35 For the purpose of introducing the wire conductor into the wire guide, however, it proves to be advantageous if the

wire guide comprises, spaced from the wire-guide nozzle, at least one wire-feed channel extending obliquely in relation to the longitudinal axis of the wire.

- 5 With a view to avoiding ultrasonically induced transverse loads on the wire conductor in the region of the wire-guide nozzle it also helps if the ultrasonic generator is arranged coaxially with respect to the wire guide.
- 10 The process according to the invention and devices that are suitable for implementing the process are elucidated below in exemplary manner on the basis of the drawings.  
Illustrated are:
  - 15 **Fig. 1** a schematic representation of the wiring of a wire conductor on a substrate by means of ultrasound;
  - Fig. 2** an electron micrograph for the purpose of representing a wire conductor embedded in the substrate;
  - 20 **Fig. 3** a wiring device for wiring a wire conductor by means of ultrasound;
  - 25 **Fig. 4** a wire conductor wired in coil form on a substrate with ends guided away via a recess in the wire conductor;
  - 30 **Fig. 5** a coil configuration that is varied in comparison with **Fig. 4** with wire ends guided away via a substrate recess;
  - 35 **Fig. 6** the placement of a chip unit in the substrate recess represented in **Fig. 5**;

**Fig. 7** the connection of the wire ends represented in **Fig. 5** to terminal areas of the chip unit which is inserted in the recess;

5 **Fig. 8** a production device for the manufacture of card modules;

**Fig. 9** the wiring of a wire conductor by means of ultrasound on a rotationally symmetrical winding form;  
10

**Fig. 10** a moving coil of a loudspeaker unit manufactured by means of ultrasonic wiring on a cylindrical winding form;  
15

**Fig. 11** a longitudinal-section representation of a ribbon cable equipped with wire conductors;

**Fig. 12** another wiring device for wiring a wire conductor by means of ultrasound.  
20

**Fig. 1** shows, in a schematic representation, the wiring of a wire conductor 20 on a substrate 21 by means of a wiring device 22 with a wire guide 23 which is subjected to the  
25 action of ultrasound.

The wiring device 22 represented in **Fig. 1** is designed to be capable of being displaced along three axes and is subjected to the action of ultrasound which stimulates the  
30 wire guide 23 to execute oscillating transverse movements (arrow 24), which in the example represented in **Fig. 1** are aligned perpendicular to a wiring plane 28 spanned by lateral edges 25, 26 of a substrate surface 27.

35 For the purpose of wiring, the wire conductor 20 is moved out of a wire-guide nozzle 30 while executing a continuous advancing movement in the direction of the arrow 29,

whereby at the same time the wire guide 23 executes a wiring movement 29 which extends parallel to the wiring plane 28 and which in **Fig. 1** can be retraced from the course of the wire-conductor section already wired on the substrate 21. On this wiring movement, which extends in the region of the front lateral edge 25 in the direction of the arrow 29, the oscillating transverse movement 24 is superimposed. This results in an impinging or impacting of the wire-guide nozzle 30 on the wire conductor 20 which is repeated in rapid succession corresponding to the ultrasonic frequency, leading to a compression and/or displacement of the substrate material in the region of a contact point 32.

**Fig. 2** shows in a sectional representation, which corresponds roughly to the course of the line of intersection II-II indicated in **Fig. 1**, the embedded arrangement of the wire conductor 20 in the substrate 21. The substrate represented here is a PVC sheet, whereby for the purpose of embedding the wire conductor 20 the wire conductor is subjected via the wiring device 22 to, for example, an ultrasonic power output of 50 W and an ultrasonic frequency of 40 kHz. The contact force with which the wire-guide nozzle 30 is caused to abut the substrate surface 27 may, in the case of the aforementioned substrate material, lie in the range between 100 and 500 N. As is evident from the representation according to **Fig. 2**, in a test which was carried out by adjusting the aforementioned parameters an embedding of the wire conductor 20 into the substrate 21 was obtained substantially by virtue of a compression of the substrate material in a compression region 33 of the substrate material which here is crescent-shaped.

The wiring principle represented in **Fig. 1** can be universally employed. For instance, departing from the use elucidated in detail below in connection with the



manufacture of a card module (**Figs. 4 to 7**), the principle may also find application in connection with the wiring of wire coils in plastic casings, for instance in order to form an aerial for a cordless telephone (mobile phone) or in order to form a measuring coil of a sensor.

**Fig. 3** shows the wiring device 22 in an individual representation with an ultrasonic generator 34 which is arranged coaxially with respect to the wire guide 23 and is rigidly connected to the latter in a connecting region 35. Overall the wiring device 22 represented in **Fig. 3** is of rotationally symmetrical construction. The wire guide 23 comprises a central longitudinal bore 36 which in the region of the wire-guide nozzle 30 merges with a wire capillary 37 which in comparison with the longitudinal bore 36 has a narrowed diameter that is matched to the diameter of the wire conductor 20. The wire-guidance capillary 37 serves primarily to be able to align the wire conductor exactly in the wiring plane 28 (**Fig. 1**).

In the embodiment example represented in **Fig. 3** there are arranged to the side of the wire guide 23, above the wire-guide nozzle and leading into the longitudinal bore 36, two wire-feed channels 38, 39 which extend obliquely downwards in the direction of the wire-guide nozzle 30. The wire-feed channels 38, 39 serve for lateral introduction of the wire conductor 20 into the wire guide 23, so that the wire conductor 20, as represented in **Fig. 3**, extends laterally on a slant into the wire-feed channel 38, through the longitudinal bore 36 and, guided out of the wire-guidance capillary 37, through the wire guide 23. In this case the multiple arrangement of the wire-feed channels 38, 39 permits selection of the wire-supply side of the wire guide 23 that is most favourable in the given case.

As is further evident from **Fig. 3**, the wire-guide nozzle 30 is of convex construction in the region of a wire outlet 40

in order to enable a deflection of the wire conductor 20 that is as non-damaging as possible in the region of the contact point 32 (**Fig. 1**) or in the region of the wire outlet 40 in the course of the wiring operation represented in **Fig. 1**.

Although not represented in any detail in **Fig. 3**, the wire guide 23 may be equipped with a wire-severing instrument and a wire-advancing instrument. In this case the wire-severing device may be directly integrated into the wire-guide nozzle 30. **Fig. 4** shows a wire conductor 20 which, for the purpose of forming a coil 41 which in this case takes the form of a high-frequency coil, is wired on a substrate 42. The coil 41 here has a substantially rectangular configuration with an initial coil region 43 and a final coil region 44 which are guided away via a window-shaped substrate recess 45. In this case the initial coil region 43 and the final coil region 44 are in parallel alignment with a main coil strand 46 which they accept between them in the region of the substrate recess 45. In the course of the ultrasonic wiring of the wire conductor 20 already elucidated in principle with reference to **Fig. 1** the ultrasonic loading of the wire conductor 20 is interrupted while the latter is being guided away via the substrate recess in the course of the wiring operation, in order on the one hand to ensure no impairment of the alignment of the wire conductor 20 in an unrestrained region 47 between the recess edges 48, 49 located opposite one another and on the other hand in order to rule out stressing of the connection between the wire conductor 20 and the substrate 42 in the region of the recess edges 48, 49 by tensile stresses on the wire conductor 20 as a consequence of ultrasonic loading.

**Fig. 5** shows, in a configuration that is modified in comparison with **Fig. 4**, a coil 50 with an initial coil region 51 and a final coil region 52 which are guided,

angled in relation to a main coil strand 53, into an interior region of the coil 50. The coil 50 is arranged on a substrate 55 which comprises a substrate recess 56 in the interior region 53 of the coil 50. In order to be able to  
 5 guide away both the initial coil region 51 and the final coil region 52 via the substrate recess 56, in the case of the configuration represented in **Fig. 5** the final coil region 52 has to be guided away beforehand in a crossing region 57 via the main coil strand 44. In order in this  
 10 case to prevent damage to or a partial stripping of the wire conductor 20, similarly as in the region of the substrate recess 56 the ultrasonic loading of the wire conductor 20 is interrupted in the crossing region 57. Furthermore, the wire guide 23 is slightly raised in the  
 15 crossing region 57.

**Fig. 6** shows, in a view of the substrate 55 corresponding to the course of the line of intersection VI-VI in **Fig. 5**, the placement of a chip unit 58 in the substrate recess 56,  
 20 wherein terminal areas 59 of the chip unit 58 are caused to abut the initial coil region 51 and the final coil region 52.

**Fig. 7** shows the subsequent connection of the terminal  
 25 areas 59 of the chip unit 58 to the initial coil region 51 and to the final coil region 52 by means of a thermode 60 which under the influence of pressure and temperature creates a connection by material closure between the wire conductor 20 and the terminal areas 59, as an overall  
 30 result of which a card module 64 is formed.

In the case of the chip unit 58 represented in **Figs. 6** and **7** it may also be a question, as in all other remaining cases where mention is made of a chip unit, either of an  
 35 individual chip or of a chip module which, for instance, comprises a chip which is contacted on a chip substrate or even a plurality of chips. Furthermore, the connection

represented in **Figs. 6** and **7** between the coil 50 and the terminal areas 59 is not restricted to the connection to one chip but applies generally to the connection of electronic components comprising terminal areas 59 to the coil 50. In this case it may be also a question, for example, of capacitors.

Furthermore, it becomes clear from **Figs. 6** and **7** that the substrate recess 56 is so dimensioned that it substantially accepts the chip unit 58. With a view to simplifying the alignment of the terminal areas 59 of the chip unit 58 in the course of the placement of the chip unit 58 preceding the actual contacting, the chip unit 58 may be equipped on its contact side 61 comprising the terminal areas 59 with an alignment aid 62 which here is constructed in the manner of a bridge. The alignment aid 62 is dimensioned so as to correspond to the spacing at which the initial coil region 51 and the final coil region 52 have from one another in the region of the substrate recess 56 (**Fig. 5**).

**Fig. 8** shows a production device 63 that serves for the manufacture of card modules 64 that are used as semi-finished products in the manufacture of chip cards. The card modules 64 manufactured by means of the production device 63 here have, by way of example, the structure represented in **Figs. 5, 6** and **7** with, in each instance, a coil 50 and a chip unit 58 arranged on a common substrate 55.

The production device 63 represented in **Fig. 8** comprises five stations, namely a feed station 65, a wiring station 66, an assembly station 67 and a connection station 68 as well as an extraction station 69.

In the feed station there is supplied to the production device 63 a so-called yield 70 which exhibits in a common composite a plurality of substrates 55 - here for

representational reasons only twenty - which are connected to one another via points of separation which are not represented here in any detail. The yield 70 is supplied by means of a transport instrument 71 to the wiring station 5 66 which comprises at a portal 73, which extends transversely in relation to the production direction 72 and is capable of being displaced in the production direction 72, four identical wiring devices 22 arranged in a row. The wiring devices 22 are supplied with the wire conductor 10 20 via four wire-conductor coils 74. For the purpose of forming the coil configurations represented by way of example in **Fig. 5**, the wiring devices 22, which are capable of being displaced along the portal 73, are displaced appropriately in the wiring plane 28 (**Fig. 1**).

15 After wiring of the wire conductors 20 corresponding to the coil configuration represented in **Fig. 5**, the yield 70 with the coils 50 formed thereon is moved on further to the assembly station 67. In the present case the connection 20 station 68 is combined with the assembly station 67 in such a way that, on a portal 75 which is capable of being displaced in the production direction 72, both an assembly device 76 and a connecting device 77 are arranged so as to be capable in each instance of being displaced in the 25 longitudinal direction of the portal 75. In this case the assembly device 76 serves for extraction of chip units 58 from a chip-unit reservoir 78 and for subsequent placement of the chip units 58 in the manner represented in **Fig. 6**. The connecting device 77 serves to bring the terminal areas 30 59 of the chip units 58 into contact with the coil 50, as represented in **Fig. 7**.

After assembly and contacting, the yield 70 is moved on further into the extraction station 69. Here an extraction 35 of the yield 70 takes place with subsequent separation of the substrates 55, or firstly a separation of the substrates 55 - that is to say, a dispersion of the

composite yield - and subsequently the extraction of the individual substrates 55 which now take the form of card modules 64.

5 **Fig. 9** shows a particular application of the process elucidated by way of example on the basis of **Fig. 1** for the manufacture of a cylindrical formed coil 79 wherein the substrate takes the form of a cylindrical winding support 80 and the wiring or embedding of the wire conductor 20 on  
10 the winding support 80 is effected in the course of rotation 81 of the winding support 80 with simultaneous superimposed translation 82 of the wiring device 22.

As **Fig. 10** shows, the winding support 80 may also take the  
15 form of a cylindrical extension of a plastic vibrating diaphragm 83 of a loudspeaker unit 84, so that in the manner represented in **Fig. 9** a moving coil 85 is capable of being manufactured such as serves, in combination with a permanent magnet indicated in **Fig. 10**, to form a  
20 loudspeaker unit 84.

**Fig. 11** shows, by way of another possible application of the process that has been described, a ribbon-cable section 85 with a substrate 86 taking the form of a ribbon cable  
25 which, adjoined on both sides by points of separation 87, is provided with substrate recesses 88 arranged in a row transverse to the longitudinal direction of the substrate 86. On the substrate 86 there are located, arranged parallel to one another and extending in the longitudinal  
30 direction of the substrate 86, a plurality of wire conductors 20 which are wired on the substrate 86 in the manner represented by way of example in **Fig. 1**. In this case the wire conductors 20 are guided away in the region of the points of separation 87 via the substrate recesses  
35 88. The points of separation serve for the definition of predetermined ribbon-cable pieces 89, whereby the substrate recesses 88 are then arranged in each instance at one end

of a piece of ribbon cable. In particularly favourable manner this results in contacting possibilities for connector plugs or connector sockets with the wire conductors 20 without the wire conductors having firstly to be exposed for this purpose. The substrate recesses 88 are introduced into the substrate 86 in a stamping process with an appropriately formed punch tool, whereby as a result of the spacing of the stampings the spacing of the points of separation 87 is preset. Subsequently the appropriately prepared continuous substrate is covered with the wire conductors 20, whereby in this case a number of wiring devices corresponding to the number of wire conductors 20 are arranged above the substrate which is moved longitudinally.

**Fig. 12** shows, in a modification of the wiring device 22 represented in **Fig. 3**, a wiring device 91 which, like the wiring device 22, comprises an ultrasonic generator 34. As distinct from the wiring device 22, there is no wire guide fastened to the connection region 35 of the ultrasonic generator 34 but rather a vibrating punch 92 which, as represented in **Fig. 12**, serves to subject the wire conductor 20 which is guided between a profiled end 93 and the surface of the substrate 21 to the action of mechanical vibrations extending in the longitudinal direction of the vibrating punch 92 and induced by ultrasound. In order in this case to enable reliable guidance of the wire conductor 20, the profiled end 93 is provided with a concave recess which is not represented in **Fig. 12** in any detail and which enables partial encompassing of the wire conductor 20.

As distinct from the wiring device 22 represented in **Fig. 3**, on the wiring device 91 a wire guide 94 is provided which, in the case of the embodiment example represented here, is formed from a guidance tube 95 arranged laterally on the ultrasonic generator 34 with an elbow nozzle 96 which is formed in the direction of the profiled end 93 and

which enables lateral supply, here directed obliquely downwards, of the wire conductor 20 in the direction of the profiled end 93. Hence, as represented in **Fig. 12**, the wire conductor 20 can be guided between the profiled end 93 of the vibrating punch 92 and the surface of the substrate 21 in order to enable the previously described connection to, or alternatively wiring on, or in, the surface of the substrate 21.

10 Departing from the representation in **Fig. 12**, it is also possible to provide the wire guide on the wiring device 91, decoupled from the ultrasonic generator 34, in order where necessary to enable vibration-free supply of the wire conductor.

15 In the case of the embodiment example represented in **Fig. 12** the wiring device comprises a wire coil 99 which is capable of rotating about a winding axis 98 arranged transverse to the punch axis 97 and which serves to supply the wire conductor 20 into the wire guide 95.

In order to enable arbitrary wiring of the wire conductor 20 on the surface of the substrate 21, the wiring device 91 comprises, coaxially with respect to the punch axis 97, a pivotal axis 100.

In the language of the present patent application the terms "wire-shaped conductor" and "wire conductor" generally designate conductors for the transmission of signals that have a defined longitudinal extent and therefore with respect to their external shape are of wire-shaped construction. However, the term "wire conductor" is not restricted to metallic conductors but also designates conductors made of other materials, for example light guides made of glass fibre, or even conductors that serve for the guidance of flowing media. Particularly in the case where the conductors used are provided with an



adhesive surface it is also possible for the conductors to be disposed in multiple layers located on top of one another, the lowest layer being connected to the surface of the substrate and other layers being connected in each instance to conductor layers arranged below them. The adhesion may, for example, be obtained via a coating of the conductor with baking lacquer which with regard to its adhesive effect is capable of being activated by means of the action of heat, or via an appropriate plastic coating.

**Fig. 13** a card inlet pertaining to a chip card with a transponder unit formed from a wire coil and a chip unit;

**Fig. 14** a sectional representation of the card inlet represented in **Fig. 13** according to the course of the line of intersection II-II, for the purpose of elucidating the manufacturing process;

**Fig. 15** another sectional representation of the card inlet represented in **Fig. 13** according to the course of the line of intersection III-III;

**Fig. 16** a representation corresponding in its view to **Fig. 14** for the purpose of elucidating an alternative procedure with subsequent application of a chip unit;

**Fig. 17** the contacting of the chip unit applied subsequently according to **Fig. 17**;

**Fig. 18** a possible contact metallisation of a terminal area of a chip with contacting according to the process represented in **Fig. 17**;

**Fig. 19** another possible contact metallisation of a terminal area of a chip;

**Fig. 20** a representation corresponding in its view to **Fig. 14** of a transponder unit arranged on a coil substrate.

**Fig. 13** shows a chip-card inlet 110 which, with a view to the manufacture of a chip card by way of end product which is not represented in any detail here, is provided with bilateral surface layers which as a rule are applied onto the chip-card inlet in the form of laminated layers covering the surface.

The chip-card inlet 110 consists here of a coil substrate 111 formed from plastic material, onto which a wire coil 112 is applied with the aid of wire-laying technology. To this end a wire conductor 113 is wired on the surface of the coil substrate 111 by means of a wiring instrument which is not represented in any detail in **Fig. 13** and is partially embedded into the coil substrate 111 by ultrasonic loading, as can be gathered from **Fig. 14**.

As is evident furthermore from the representation according to **Fig. 13**, in the coil substrate 111 a recess 114 is provided which serves to accept a chip unit constituted here by an individual chip 115. The chip unit may, as in the present case, be constituted merely by the chip 115. However, it is further possible for the chip unit to be formed from a so-called "chip module" which accepts one or even several cased chips.

As is further evident from **Fig. 13**, the wire conductor 113 which is wired for the purpose of forming the wire coil 112 on the coil substrate 111 is contacted with wire ends 116, 117 on an assigned terminal area 118 and 119, respectively, of the chip 115.

A process for implementing the contacting of the wire ends 116, 117 with the terminal areas 118, 119 of the chip 115 will be elucidated in more detail below with reference to

**Fig. 14.** The process represented in detail in **Fig. 14** is effected in two successive phases, which here for the purpose of differentiation are denoted by I and II. In the phase designated by I the wire end 116 illustrated here is fixed on the coil substrate 111, whereby simultaneously as a consequence of the aforementioned wiring process for applying the wire conductor 113 onto the surface of the coil substrate 111 the wire conductor 113 is guided away via the chip 115 that is received in the recess 114. With a view to implementing the process represented in **Fig. 14**, the coil substrate 111 is arranged on a table 120 together with the chip 115 received in the recess 114.

By way of wiring instrument, in the case of the process example represented in **Fig. 14** use is made of an ultrasonic instrument 121 which with a vibrating punch 122 embeds the wire conductor 113 which is continuously guided out of a wire guide 123 into the surface of the coil substrate 111 and thereby simultaneously executes a horizontal movement 124 on the surface of the coil substrate 111. This application of the wire conductor 113 on the surface of the coil substrate 111, which is described by the term "wiring", is firstly effected in the region designated by Ia to the left of the recess 114, subsequently the wire conductor 113 is guided away with the wire guide 123 via the chip 115 which is arranged in the recess 114, in order finally to continue with the fixation of the wire conductor 113 on the right-hand side of the recess 114 in the region headed by Ib by means of ultrasonic loading of the wire conductor via the vibrating punch 122. Although when use is made of the ultrasonic instrument 121 described above for wiring the wire conductor 113 on the coil substrate 111 a fixation of said wire conductor arises extending substantially over the entire length of the wire conductor 113 on the coil substrate 111, in order to realise the principle of the process it is sufficient if a fixation of the wire conductor 113 on the coil substrate 111 is

effected merely at two points to the left and right of the recess 114, in order to achieve the linear alignment of the wire conductor 113 represented in **Fig. 14** via the terminal areas 118, 119 of the chip 115.

5

After the wire conductor 113 is located in the position spanning the assigned terminal area 118 of the chip 115, in the phase denoted by II the connection of the wire conductor 113 to the terminal area 118 is effected. To this end use is made, in the process example represented in **Fig. 14**, of another ultrasonic instrument 125 which, as is evident in particular from **Fig. 15**, comprises a profiled end 126 pertaining to a vibrating punch 127 and provided with a concave recess.

15

The process described above with reference to **Figs. 14** and **15** also offers the possibility, by appropriate choice of the points of fixation of the wire conductor on the substrate, of guiding the wire conductor away diagonally via the terminal areas, in order to increase the overlap between the wire conductor and the terminal areas. Also, several chips or other elements arranged in series on, or in, a substrate can be connected by means of the wire conductor in the manner represented in **Fig. 14**.

25

Furthermore, **Fig. 15** shows clearly that, in contrast with the vibrational loading 128 induced by ultrasound which is effected in the longitudinal direction of the vibrating punch 122 of the ultrasonic instrument 121, the vibrational loading 129 of the vibrating punch 127 induced by ultrasound is effected transverse to the longitudinal direction of the wire conductor 113 and parallel to the surface of the coil substrate 111. On this vibrational loading 128 a slight contact pressure 130 is superimposed, so that the wire conductor 113 which is received in guided manner in the profiled end 126 of the vibrating punch 127 is moved back and forth in oscillating manner under

35

pressure in the region of the terminal area 118 above the latter. On the one hand this results in any oxide skins that may be present on the terminal area 118 being ripped open and eroded, on the other hand a welding subsequently results, given appropriately high or increased contact pressure 130, of the wire conductor 113, which here is formed from copper, to the aluminium terminal area 118. In case the wire conductor 113 is provided with an external insulation the latter can also be removed by the oscillating movement back and forth in the region of the terminal area 118, so that subsequently the metallic connection previously described between the wire conductor, which immediately beforehand is still protected against oxidation by the insulation, and the terminal area becomes possible.

In the coil substrate 111 represented in **Figs. 14 and 15** the recess 114 is arranged so as to be larger than the corresponding dimensions of the chip 115, so that a circumferential gap 130 results between the chip 115 and the edges of the recess 114. By this means a virtually "floating acceptance" of the chip 115 in the recess 114 is possible, whereby, although said chip is substantially defined in its location relative to the coil substrate 111, it is able to execute minor relative movements. This results in the advantage that, by virtue of the laminating operation described in the introduction for application of the bilateral surface layers onto the coil substrate 111, the chip can at least partially avoid the pressure loads associated with the laminating operation and consequently the risk of damage to the chip in the course of the laminating operation is significantly reduced.

In order also in the case of the "floating acceptance" of the chip in the recess 114 described above to be able to carry out an exact positioning of the wire conductor 113 on the terminal area 118, the wire conductor 113 can be

tracked via a corresponding transverse-movement axis 131 of the ultrasonic instrument 125.

Although with reference to the process example represented in **Figs. 14** and **15** two different ultrasonic instruments 121 and 125 were mentioned in the foregoing description, there is also the possibility, given appropriate design of the ultrasonic instrument 121, of making use of the latter both for the wiring and/or fixation of the wire conductor on the surface of the coil substrate 111 and for the connection of the wire conductor 113 to the respectively assigned terminal area 118 or 119.

A way of proceeding that is slightly varied in comparison with **Figs. 14** and **15** is represented in **Figs. 16** and **17**, wherein only after fixation of the wire conductor 113 on the surface of the coil substrate 111 on both sides of the recess 114 is a chip 132 introduced into said recess. In order simultaneously with the introduction of the chip 132 into the recess 114 to enable a positioning that is suitable for the subsequent contacting of the wire conductor 113 with an assigned terminal area 133 of the chip 132, the latter is equipped on its contact side 134 with bridge-type alignment aids 135, in each instance arranged adjacent to a terminal area 133, which provide for correct relative positioning via guide bevels 136.

**Fig. 17** shows, in addition, a thermode instrument 137 which can be employed as an alternative to the ultrasonic instrument 125 by way of a connecting instrument which enables a connection of the wire conductor under pressure and temperature loading to the assigned terminal area 133. With both of the connection processes represented in **Figs. 14**, **15** and **17** there is, in principle, the possibility of establishing the connection between the wire conductor and the terminal areas by a superimposition of ultrasonic

loading and temperature loading, for example by means of a heatable ultrasonic instrument.

In order to enable a connection of the copper wire conductor 113 to the aluminium terminal areas 133 of the chip 132, the terminal areas 133 are provided with a contact metallisation 138 (**Fig. 18**) or 139 (**Fig. 19**). The contact metallisations 138, 139 comprise, in corresponding manner, a zincate layer serving as intermediate layer 140 which serves as foundation for a nickel layer 141 applied to it in the case of the contact metallisation 138, or a palladium layer 142 in the case of the contact metallisation 139. With a view to improving the connecting capacity or with a view to increasing the oxidation resistance, the nickel layer 141 is also provided with a gold coating 145. For the purpose of clarifying the size dimensions, layer thicknesses of the layers that are applied to the aluminium coating, about 1 to 2  $\mu\text{m}$  in thickness, of the terminal area 133 are given below by way of examples:

zincate layer:	$d = 150 \text{ nm};$
nickel layer:	$d = 1 - 5 \mu\text{m};$
palladium layer:	$d = 1 - 5 \mu\text{m};$
gold coating:	$d = 100 - 150 \text{ nm}.$

**Fig. 20** finally shows, in a variant of the representation according to **Fig. 13**, the possibility of applying the process described above also for the direct contacting of the wire conductor 113 with assigned terminal areas 118 and 119 of the chip 115 if the chip 115 is not arranged in a recess but rather on the surface of a substrate 143. In the case of the substrate 143 represented in **Fig. 20** it may be a question, for example, of a paper substrate or of any other substrate. Conforming with the process elucidated with reference to **Figs. 14** and **15**, here too on both sides of an acceptance region or arrangement region 144 for the

chip 115 a fixation is provided of the wire conductor 113 into the surface regions of the substrate 143, here designated in simplified manner by Ia and Ib.

5 In particular on account of the particularly thinly formed substrate the embodiment represented in **Fig. 20** appears to be particularly suitable for use as a transponder arrangement in connection with the identification of luggage. Although in the foregoing embodiment examples  
10 reference is made, with a view to elucidating the process, to transponder units consisting of a coreless wire coil and a chip unit, use may of course also be made of ferrite-core coils such as are employed, for example, for the manufacture of animal transponders.

15 In any case, the chip or the chip unit can be made thinner prior to or after the application on, or in, the substrate, in order to increase the flexibility of the chip and, where appropriate, to adapt the chip to the substrate as regards  
20 its bending behaviour.



Claims

1. Process for the contacting of a wire conductor (113)  
5 in the course of the manufacture of a transponder unit arranged on a substrate (111) and comprising a wire coil (112) and a chip unit (115), wherein in a first phase the wire conductor (113) is guided away via the terminal area (118, 119) or a region accepting the  
10 terminal area and is fixed on the substrate (111) relative to the terminal area (118, 119) or the region assigned to the terminal area, and in a second phase the connection of the wire conductor (113) to the terminal area (118, 119) is effected by means of a  
15 connecting instrument (125, 137).
2. Process according to Claim 1,  
characterised in that  
for the purpose of connecting the wire conductor to  
20 the terminal area use is made of an ultrasonic instrument.
3. Process according to Claim 1,  
characterised in that  
25 both for the purpose of connecting the wire conductor to the terminal area and for the purpose of arranging the wire coil on the substrate use is made of an ultrasonic instrument.
- 30 4. Process according to Claim 1 or 3,  
characterised in that  
the arrangement of the wire coil on the substrate of the wire conductor is effected by means of a wiring device taking the form of an ultrasonic instrument in  
35 such a way that the wire conductor (20) is subjected to the action of ultrasound in a direction transverse to the wiring plane (28) and the transverse movement

(24) of the wiring device (22) generated by the ultrasonic loading is superimposed on the wiring movement (29) extending in the wiring plane (28).

- 5 5. Process according to one or more of the preceding claims,  
characterised in that  
the transverse movement (24) takes place along a  
transverse-movement axis that is variable as regards  
10 its angle in relation to the axis of the wiring movement (29).
6. Process according to one or more of the preceding claims,  
15 characterised in that  
the ultrasonic frequency and/or the angle between the axis of the wiring movement (29) and the transverse-movement axis (24) is varied as a function of the desired depth of penetration of the wire conductor  
20 (20).
7. Application of the process for the arrangement of a transponder unit comprising a coil and a chip unit on a substrate according to one or more of the preceding claims,  
25 characterised in that  
a final coil region (44) and an initial coil region (43) of a coil (41) which is formed on the substrate (21) by the wiring are guided away via a substrate  
30 recess (45).
8. Process according to Claim 7,  
characterised in that  
the ultrasonic loading of the wire conductor (20) is  
35 interrupted in the region of the substrate recess (45).

9. Process according to one or more of the preceding claims,  
characterised in that

for the purpose of crossing a wire section that has  
already been wired the ultrasonic loading of the wire  
conductor (20) is interrupted in the crossing region  
(57) and the wire conductor (20) is guided in a  
crossing plane that is spaced in relation to the  
wiring plane (28).

10. Application of the process according to one or more of  
Claims 1 to 9 for the manufacture of a card module  
(64) having a substrate (55), a coil (50) wired on the  
substrate and a chip unit (58) connected to the coil  
(50), whereby in a wiring phase a coil (50) having an  
initial coil region (51) and a final coil region (52)  
is formed on the substrate (55) by means of the wiring  
device (22) and in a subsequent connection phase a  
connection is implemented between the initial coil  
region (51) and the final coil region (52) to terminal  
areas (59) of the chip unit (58) by means of a  
connecting device (60).

11. Process according to Claim 10,  
characterised in that  
the substrate consists of a fleece-type material, in  
particular paper or cardboard, and the connection  
which is made in the course of the wiring is effected  
by means of a layer of adhesive disposed between the  
wire conductor (20) and the surface of the substrate.

12. Process according to Claim 10 or 11,  
characterised in that  
the connection of the initial coil region (51) and of  
the final coil region (52) to the terminal areas (59)  
of the chip unit (58) is effected by means of a  
thermocompression process.

13. Process according to one of Claims 10 to 12,  
characterised in that  
the manufacture of a plurality of card modules (64)  
takes place simultaneously in such a way that in a  
supply phase a plurality of substrates (55) combined  
to form a yield (70) are supplied to a production  
device (72) comprising a plurality of wiring devices  
(22) and connecting devices (60), subsequently in the  
wiring phase a plurality of coils (50) are formed  
simultaneously on substrates (55) arranged in a row,  
then in the connection phase a plurality of chip units  
(58) are connected via their terminal areas (59) to  
the coils (55), and  
finally in a separation phase a separation of the card  
modules (64) from the composite yield takes place.

14. Application of the process according to one or more of  
Claims 1 to 9 for the manufacture of a rotationally  
symmetrical formed coil,  
characterised in that  
the wire conductor (20) is wired on a substrate taking  
the form of a winding support (80) and rotating  
relative to the wiring device (22).

15. Process according to Claim 14,  
characterised by  
the manufacture of a moving coil of a loudspeaker unit  
which is integrally connected to a vibrating  
diaphragm.

16. Application of the process according to one of Claims  
1 to 9,  
characterised in that  
a number of wiring devices (22) corresponding to the  
number of cable conductors desired are arranged  
transverse to the longitudinal axis of a ribbon-shaped  
substrate (86) and a relative movement between the

substrate (86) and the wiring devices (22) takes place in the direction of the longitudinal axis of the substrate (86).

5 17. Process according to one or more of the preceding claims,  
characterised in that  
prior to the connection of the wire conductor (113) to  
the terminal area (118, 119) a preparatory treatment  
10 of the aluminium surface of the terminal area (118, 119) takes place.

18. Process according to Claim 17,  
characterised in that  
15 with a view to preparatory treatment a mechanical elimination of an oxide layer disposed on the aluminium surface is effected by subjecting the terminal area (118, 119) to the action of the ultrasonic instrument (125).

20 19. Process according to Claim 17,  
characterised in that  
with a view to preparatory treatment the aluminium surface is subjected to a cleansing process.

25 20. Process according to Claim 19,  
characterised in that  
by way of cleansing process a dry-etching process, a wet-etching process or a laser treatment of the  
30 aluminium surface is employed.

21. Process according to Claim 17,  
characterised in that  
with a view to preparatory treatment the aluminium  
35 surface is provided with a multilayered contact metallisation (138, 139) having a zincate layer which is applied by way of intermediate layer (140) onto the

aluminium face and having an interconnect layer (141, 142) which is provided for the contacting with the wire conductor (113).

- 5 22. Process according to Claim 21,  
characterised in that  
the interconnect layer takes the form of a layer  
comprising nickel or palladium.
- 10 23. Process according to one or more of the preceding  
claims,  
characterised in that  
the vibrational loading of the wire conductor (113)  
brought about by ultrasound takes place in a plane  
15 substantially parallel to the terminal area (118, 119)  
and transverse to the longitudinal axis of the wire  
conductor (113).
- 20 24. Process according to Claim 23,  
characterised in that  
the vibrational loading of the wire conductor (113)  
brought about by ultrasound serves for regional  
removal of a wire-conductor insulation.
- 25 25. Process according to one or more of the preceding  
claims,  
characterised in that  
the fixation of the wire conductor (113) is effected  
on a plastic support sheet which together with the  
30 wire conductor (113) and the chip (115) forms a card  
inlet (110) for the manufacture of a chip card.
- 35 26. Process according to Claim 25,  
characterised in that  
the fixation of the wire conductor (113) on the  
plastic support sheet and the connection of the wire  
conductor to the terminal areas of the chip (115)

serves to form a mechanical suspension of the chip on the plastic support sheet.

27. Process according to one or more of the preceding  
5 claims,

characterised in that

the fixation of the wire conductor (113) is effected  
by wiring with a wiring device comprising an  
ultrasonic instrument.

- 10 28. Process according to Claim 25,  
characterised in that

the ultrasonic instrument (121) for the wiring of the  
wire conductor (113) on the support sheet brings about  
15 a vibrational loading of the wire conductor (113)  
transverse to the longitudinal axis of the wire  
conductor (113) and transverse to the surface of the  
support sheet, and the ultrasonic instrument (125) for  
the connection of the wire conductor (113) to the  
20 terminal area (118, 119) brings about a vibrational  
loading of the wire conductor (113) in a plane  
substantially parallel to the support sheet and  
transverse to the longitudinal axis of the wire  
conductor (113).

- 25 29. Device for implementing the process according to one  
or more of Claims 1 to 28, comprising a wire guide  
(23) and an ultrasonic generator (34), the ultrasonic  
generator (34) being connected to the wire guide (23)  
30 in such a way that the wire guide (23) is stimulated  
to execute ultrasonic vibrations in the direction of  
the longitudinal axis.

30. Device according to Claim 29,  
35 characterised by

a vibrating punch (127) partially encompassing the  
cross-section of the wire of the wire conductor (113)

and by an ultrasonic oscillator which brings about a vibrational loading of the vibrating punch (127) transverse to the longitudinal axis of the wire conductor (113) which is guided in a profiled end (126) of the vibrating punch (127).

31. Device according to Claim 30, characterised in that the ultrasonic instrument (125) is coupled to a wiring instrument.

32. Device according to Claim 30 or 31, characterised in that the ultrasonic oscillator of the ultrasonic instrument (125) serves simultaneously for ultrasonic loading of the wiring instrument.

33. Device according to Claim 32, characterised in that the ultrasonic oscillator is arranged in such a way that the axis of its effective direction is variable.

34. Device for the wiring of a wire-shaped conductor on a substrate in accordance with the process according to one or more of Claims 1 to 28, comprising a wire guide (94) and an ultrasonic generator (34), the wire guide (94) being arranged next to a vibrating punch (92) coupled to the ultrasonic generator (34) for the purpose of subjecting the wire conductor (20) to the action of mechanical vibrations induced by ultrasound and acting in the longitudinal direction of the vibrating punch.

35. Device according to Claim 34, characterised by a pivotal axis (100) coaxial with a vibrating-punch axis (97).



36. Device according to one or more of Claims 29 to 35,  
characterised in that  
the wire guide (23) comprises a wire-guidance  
capillary (37) which at least in the region of a wire-  
guide nozzle (30) extends in the wire guide (23)  
parallel to the longitudinal axis.

37. Device according to Claim 36,  
characterised in that  
the wire guide (23) comprises, spaced from the wire-  
guide nozzle (30), at least one wire-supply channel  
(38, 39) extending obliquely in relation to the  
longitudinal axis of the wire guide.

38. Device according to one or more of Claims 29 to 37,  
characterised in that  
the ultrasonic generator (34) is arranged coaxially  
with respect to the wire guide (23).

39. Device for implementing the process for the  
manufacture of a card module according to one or more  
of Claims 10 to 28 by making use of a device according  
to one or more of Claims 14 to 19, comprising

a yield supply station (65) for supplying a plurality  
of substrates (55) arranged in a yield (70),

a wiring station (66) with a plurality of wiring  
devices (22) arranged in a row transverse to the  
production direction,

an assembly station (67) with at least one assembly  
device (76) for equipping the individual substrates  
(55) with a chip unit (58) and

a connection station (68) with at least one connecting  
device (77) for connecting the chip units to an

initial coil region (51) and to a final coil region (52) of the coils (50) which are formed on the substrates (55) by the wiring devices (22).

Abstract

Process and device for the contacting of a wire conductor (113) in the course of the manufacture of a transponder unit arranged on a substrate (111) and comprising a wire coil (112) and a chip unit (115), wherein in a first phase the wire conductor (113) is guided away via the terminal area (118, 119) or a region accepting the terminal area and is fixed on the substrate (111) relative to the terminal area (118, 119) or the region assigned to the terminal area, and in a second phase the connection of the wire conductor (113) to the terminal area (118, 119) is effected by means of a connecting instrument (125).

(Fig. 14)



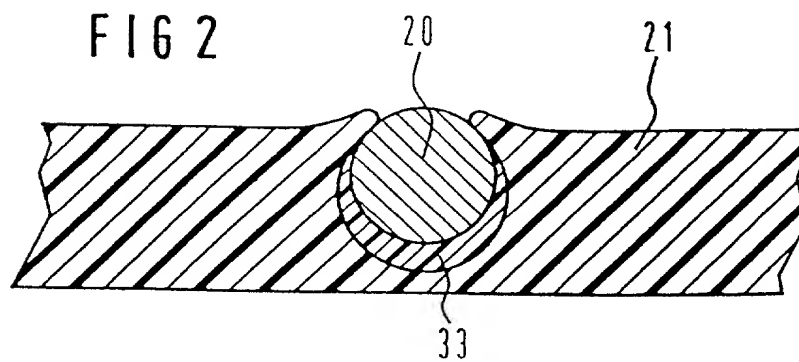


FIG 3

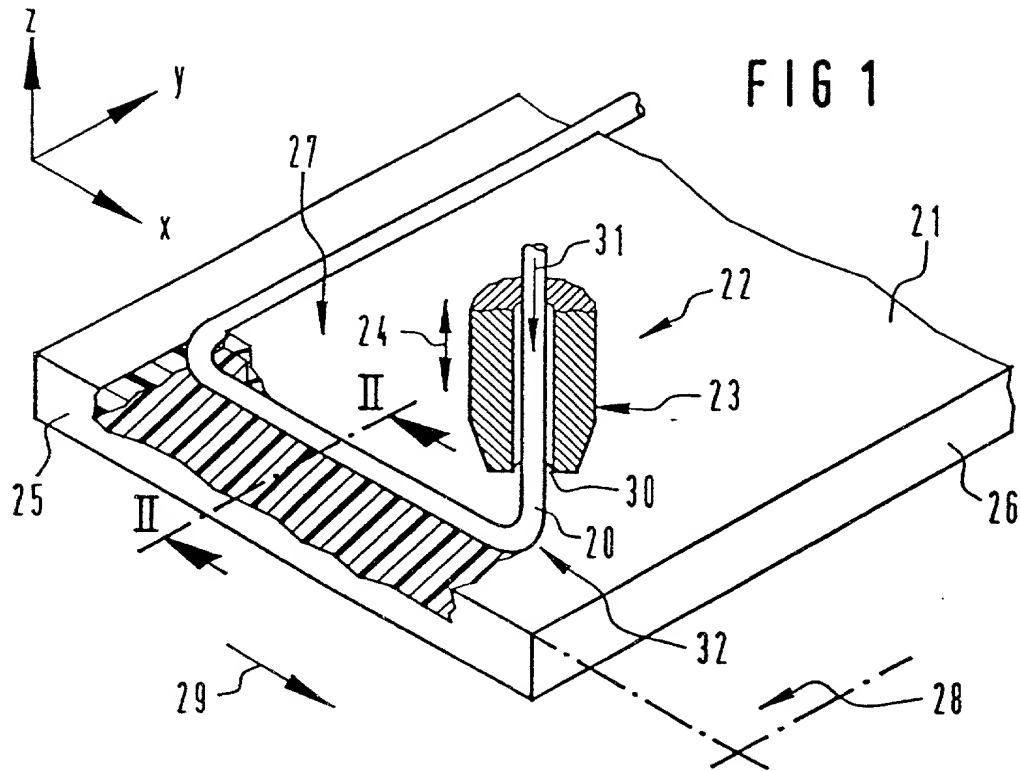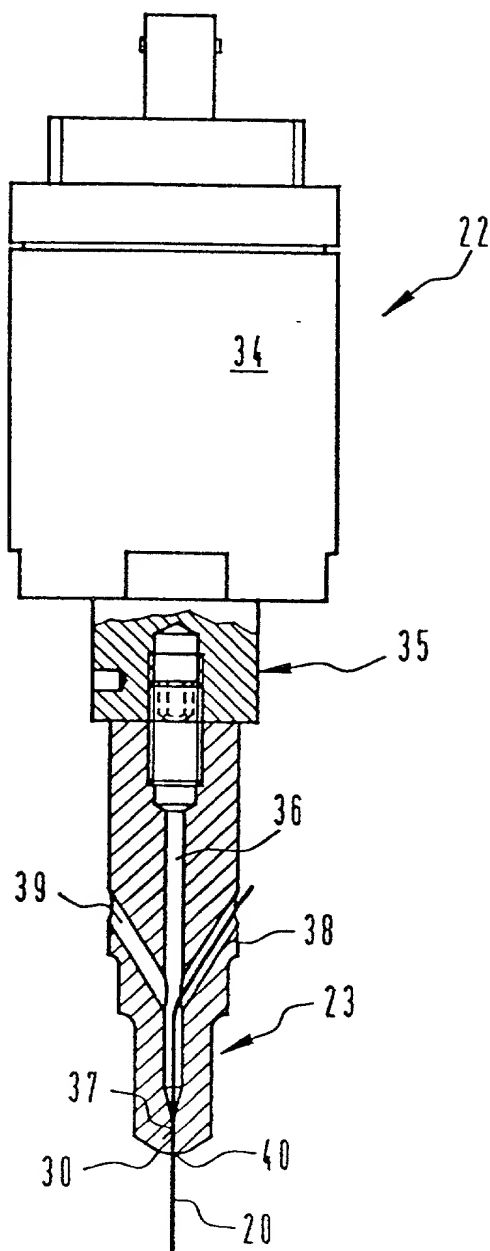

3/9

FIG 4

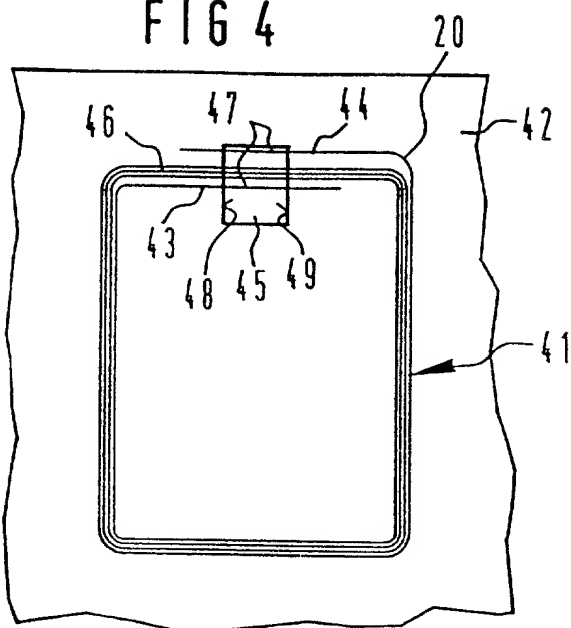


FIG 5

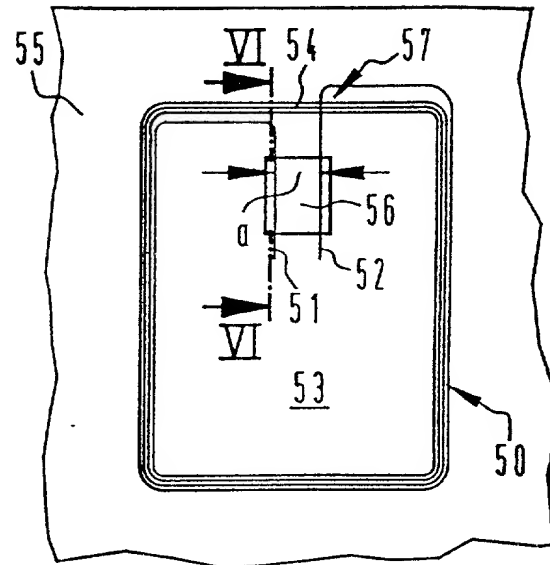


FIG 6



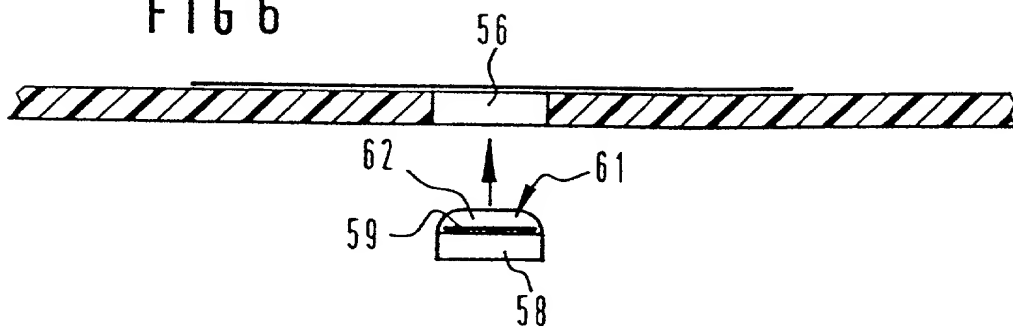


FIG 7

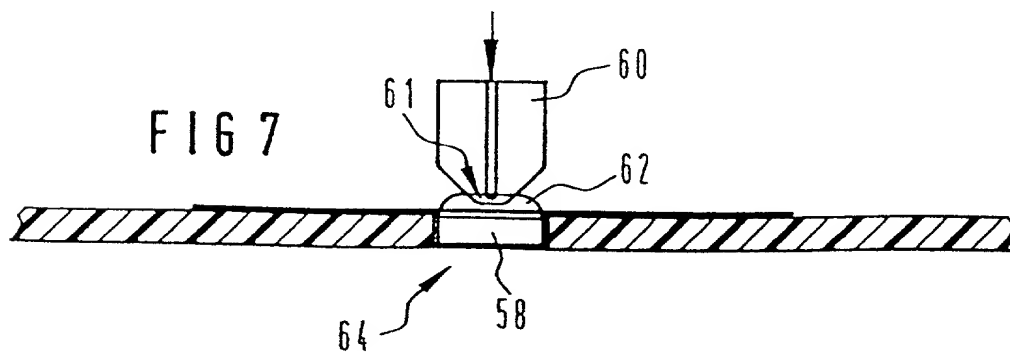

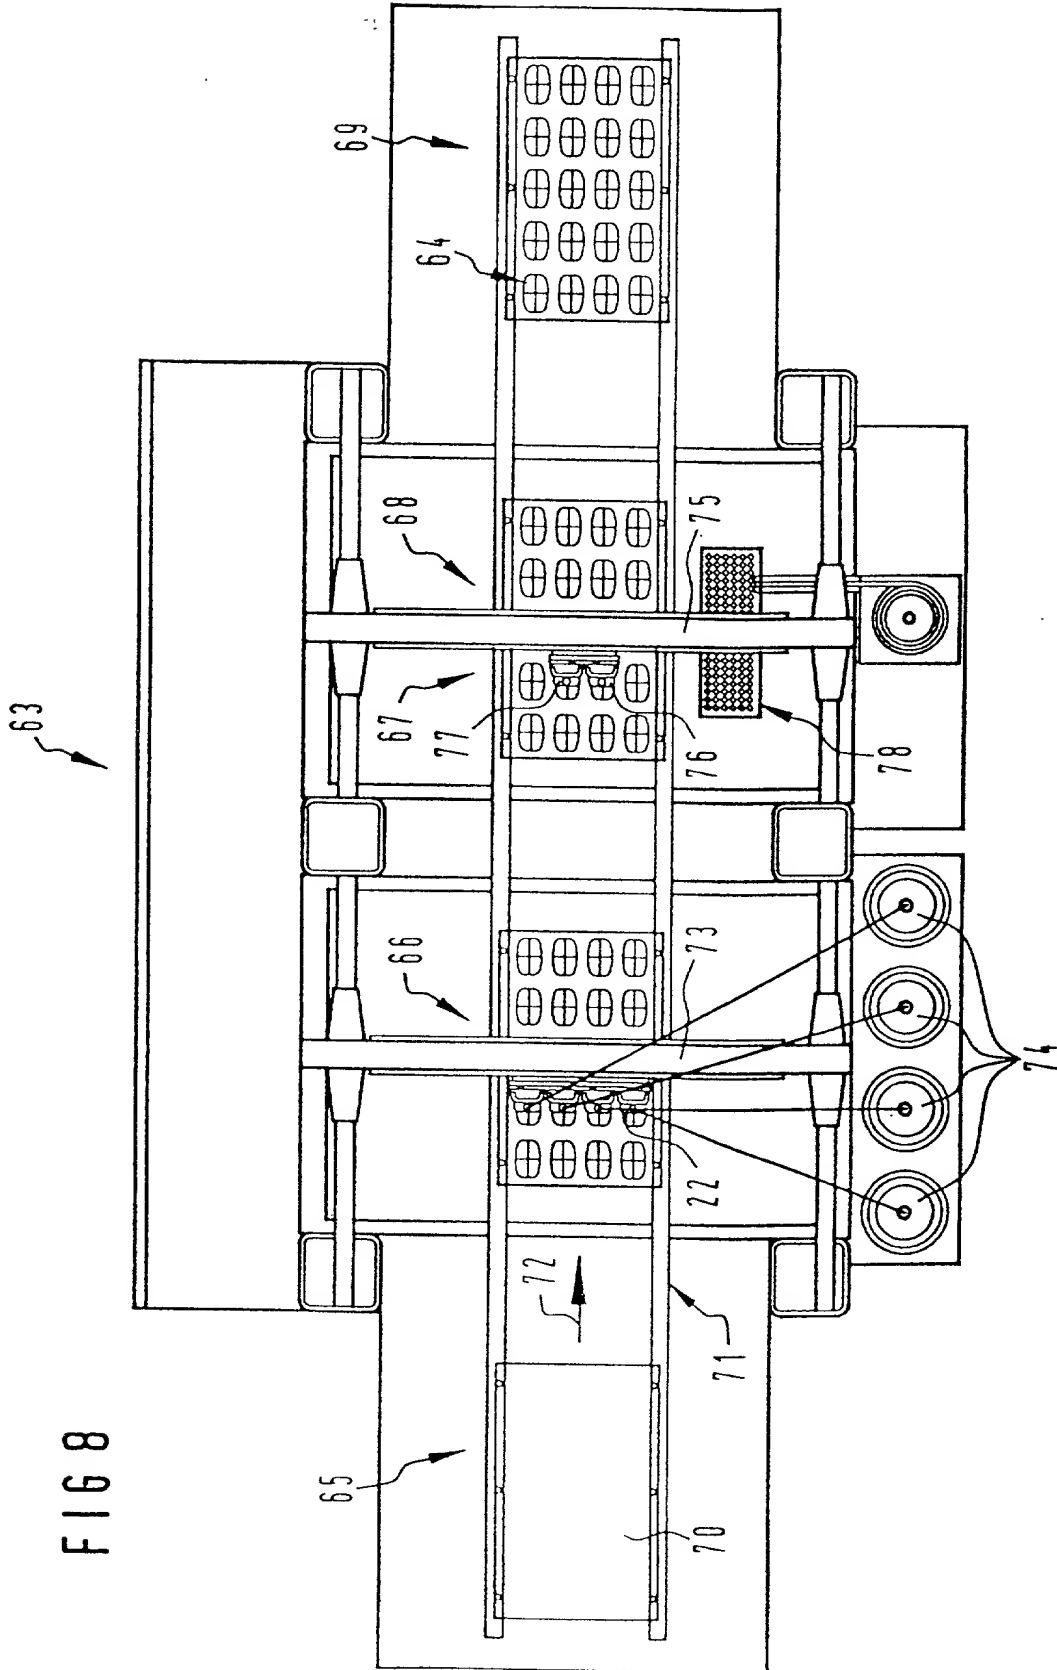

5/9

FIG 9

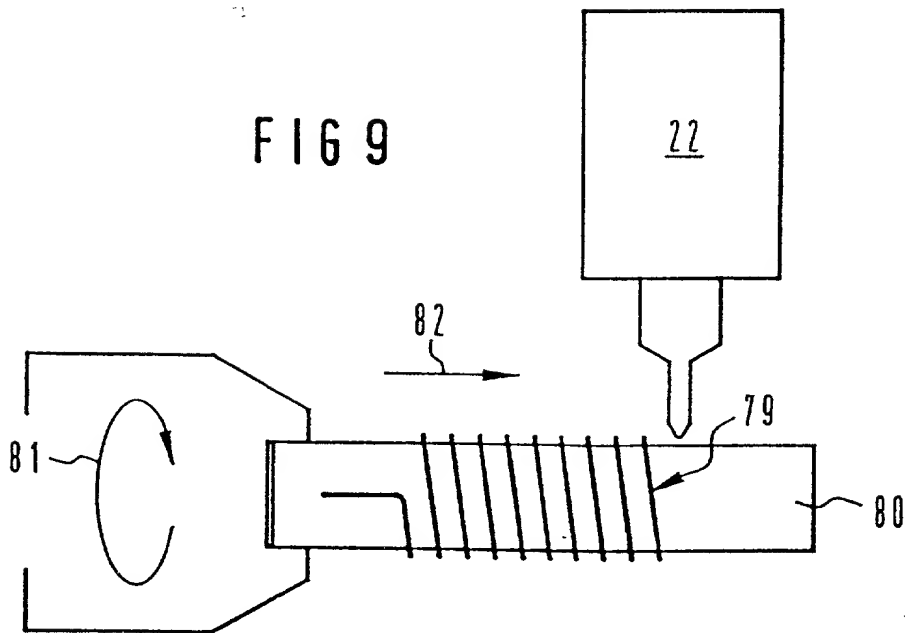


FIG 10


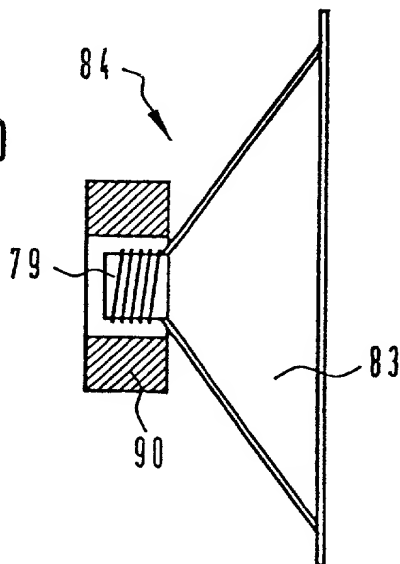


FIG 11



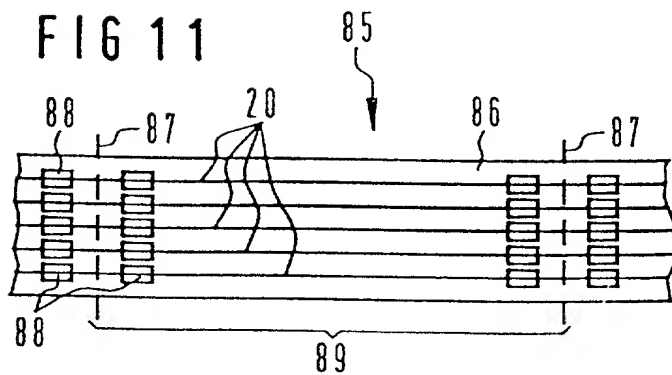

6/9

FIG 12

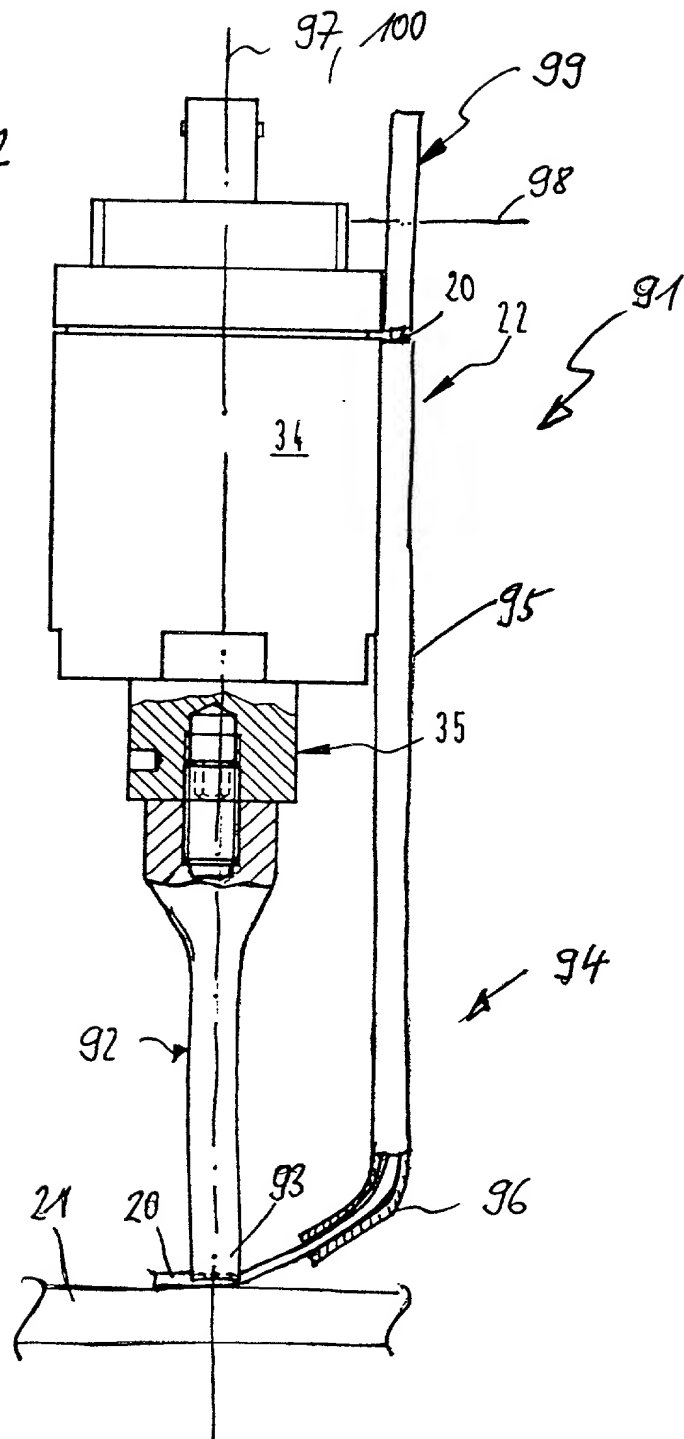


FIG 13

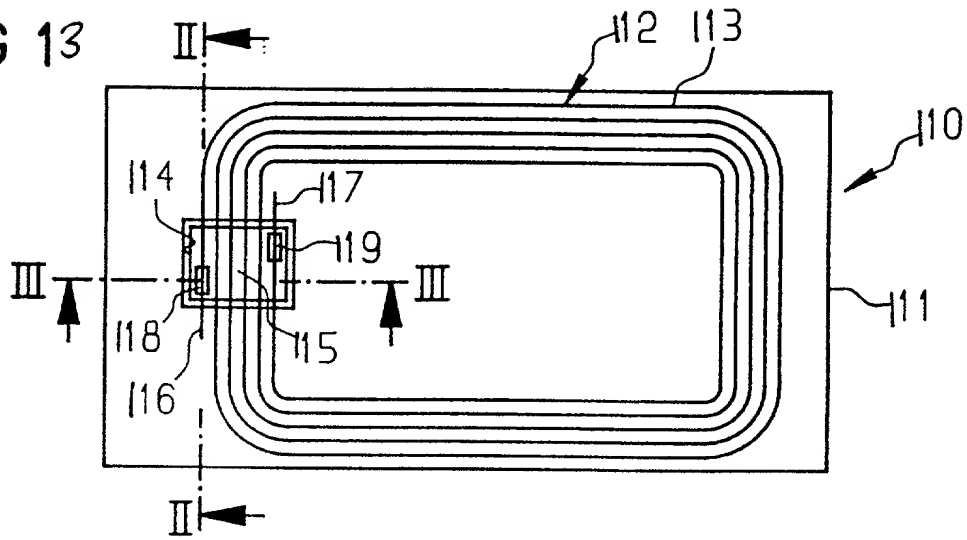


FIG 14

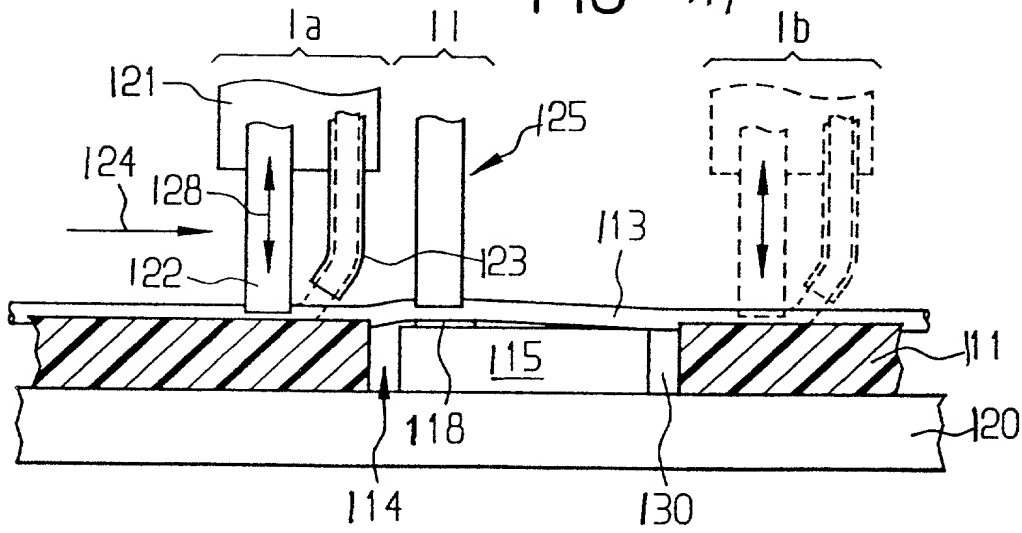
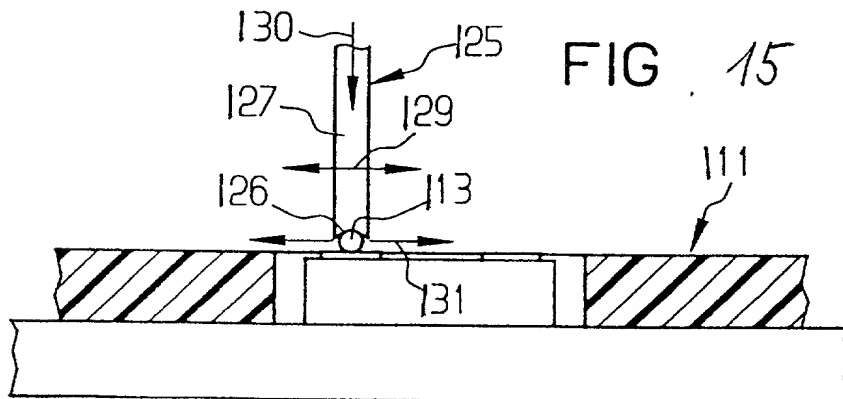


FIG 15



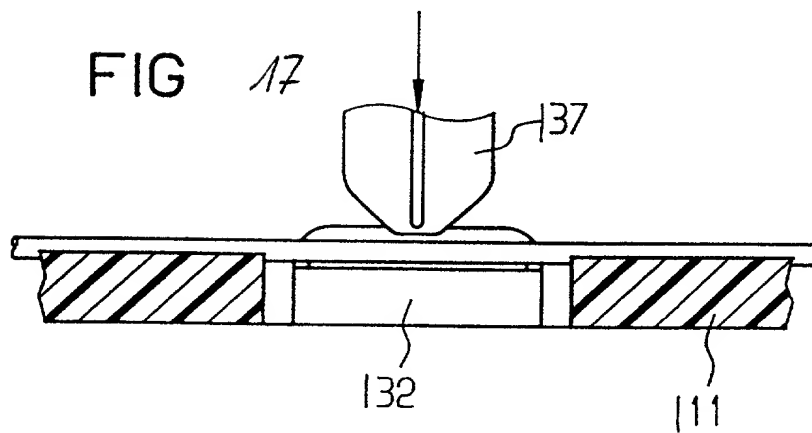
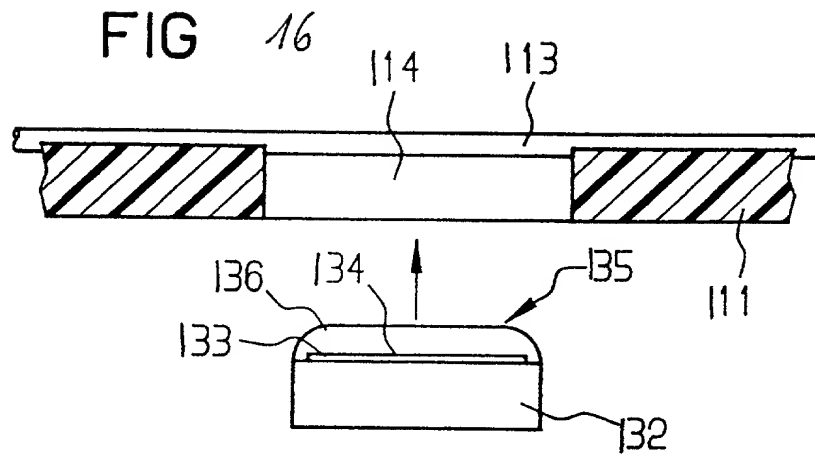


FIG 18

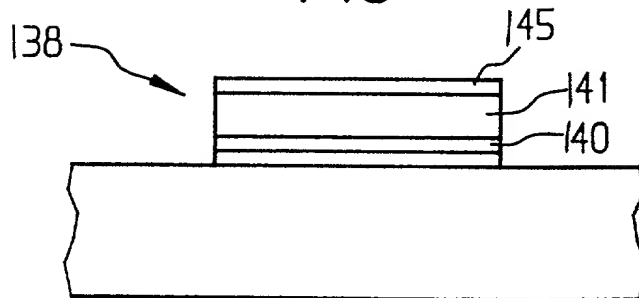


FIG 19


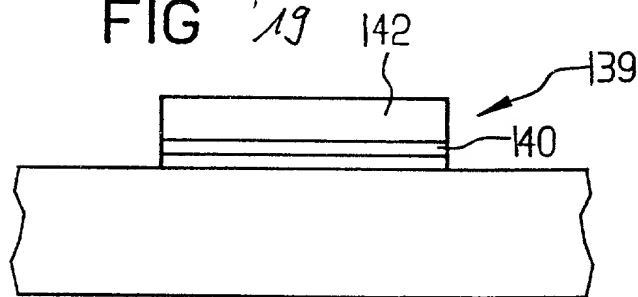


FIG 20

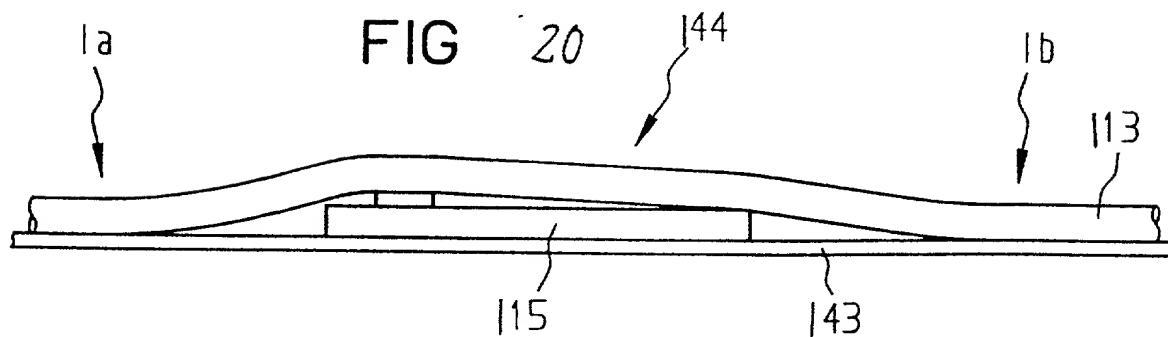

# DECLARATION FOR PATENT APPLICATION

Docket No.59276

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:  
METHOD AND DEVICE FOR BONDING A WIRE CONDUCTOR

the specification of which

(Check one) ☐ is attached hereto.

☒ was filed as PCT international application

Number PCT/DE97/00261

on February 12, 1997

and was amended under PCT Article 19

on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date or any PCT international application(s) designating at least one country other than the United States of America by me on the same subject matter having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

196 04 840.0  
(Number)

Germany  
(Country)

12/Feb./1996  
(Day/Month/Year filed)

YES

Full name of sole or first inventor David FINN

→Inventor's signature David Finn →Date 28.7.98

Residence König-Ludwig-Weg 24, D-87459 Pfronten, Germany

Citizenship Republic of Ireland

Post Office Address König-Ludwig-Weg 24, D-87459 Pfronten, Germany

Full name of second inventor Manfred RIETZLER

→Inventor's signature M. R. →Date 28.7.98

Residence Am Alsterberg 10, D-87616 Marktoberdorf, Germany Citizenship Germany

Post Office Address Am Alsterberg 10, D-87616 Marktoberdorf, Germany

Full name of third inventor \_\_\_\_\_

→Inventor's signature \_\_\_\_\_ →Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of fourth inventor \_\_\_\_\_

→Inventor's signature \_\_\_\_\_ →Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of fifth inventor \_\_\_\_\_

→Inventor's signature \_\_\_\_\_ →Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of sixth inventor \_\_\_\_\_

→Inventor's signature \_\_\_\_\_ →Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

59276.3

196 19 771.6  
(Number)

Germany  
(Country)

17/May/1996  
(Day/Month/Year filed)

YES

196 20 242.6  
(Number)

Germany  
(Country)

20/May/1996  
(Day/Month/Year filed)

YES

PCT/DE97/00261  
(Number)

Germany  
(Country)

12/Feb./1997  
(Day/Month/Year filed)

YES

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No)

(Filing Date)

(Patented,Pending,Abandoned)

(Application Serial No)

(Filing Date)

(Patented,Pending,Abandoned)

6 I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: **John J. McGlew, Reg. 17,722; and/or John James McGlew, Reg. 31,903; and/or Hilda S. McGlew Reg. 30,295; and/or Theobald Dengler, Reg. 34,575; and/or Clario Ceccon, Reg. 19,268; and/or Kristina M. Grasso Reg. 39,205.**

Address all calls to: John James McGlew at telephone no. (914) 941-5775

Address all correspondence to:

**McGLEW AND TUTTLE**  
**SCARBOROUGH STATION**  
**SCARBOROUGH, NEW YORK 10510-0827**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Applicant: FIN et al.  
Serial No.:  
Filed:  
For: METHOD AND DEVICE...

VERIFIED STATEMENT (DECLARATION) CLAIMING  
SMALL ENTITY STATUS  
(37 CFR 1.9(f) and 1.27 (b)) INDEPENDENT INVENTOR

As a below-named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled *METHOD AND DEVICE FOR BONDING A WIRE CONDUCTOR* described in

☒ the specification filed herewith  
☐ application serial no. \_\_\_\_\_, filed \_\_\_\_\_.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 35 CFR 1.9(d) or a non-profit organization under 37 CFR 19 (e).

Each person, concern or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract of law to assign, grant, convey, or license any rights in the invention is listed below:

☒ no such person, concern, or organization  
☐ persons, concerns or organizations listed below\*

\*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

NAME \_\_\_\_\_  
ADDRESS \_\_\_\_\_  
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION



NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

David FINN  
Name of Inventor

  
\_\_\_\_\_  
Signature of Inventor

28.7.98  
\_\_\_\_\_  
Date

Manfred RIETZLER  
Name of Inventor

  
\_\_\_\_\_  
Signature of Inventor

28.7.98  
\_\_\_\_\_  
Date

59276.4